


CINEMA Hybrid(Bi-Color/CCT) Flex LED Strip

-2835/5730/3014/3020/2216 Hybrid Series

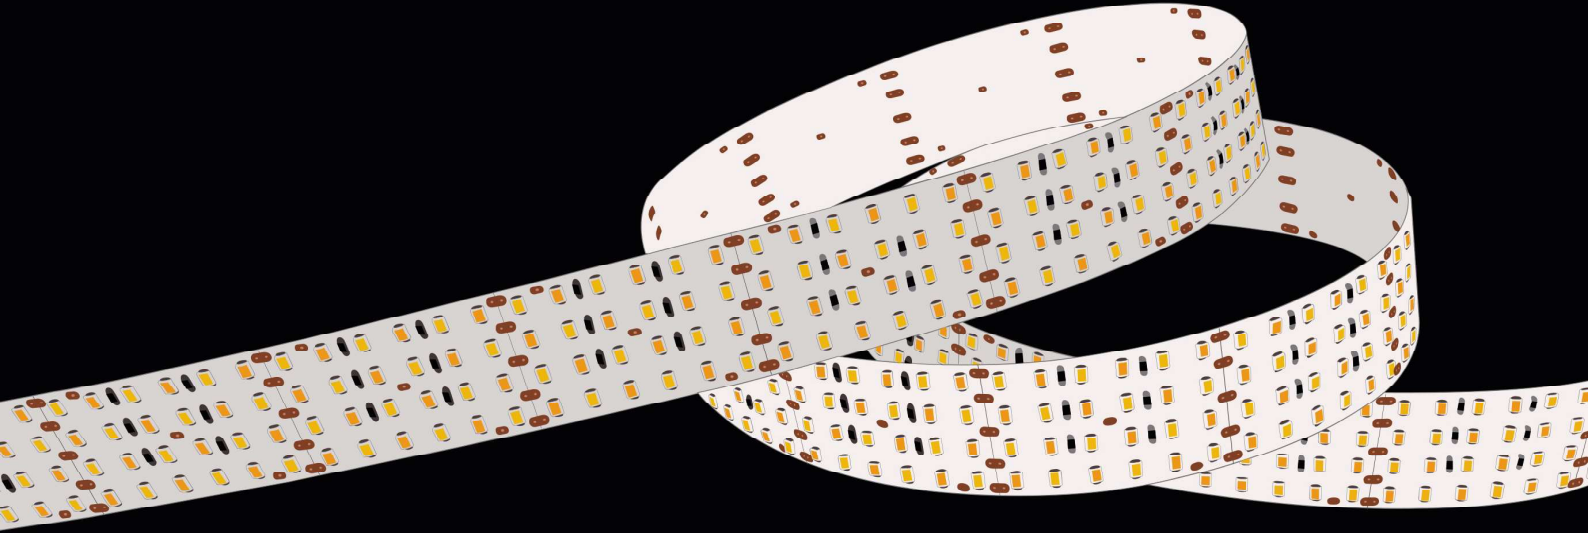

Content

Content 1

General Information 2

2835 Hybrid 120leds/m 12V/24V 5

2835 Hybrid 168leds/m 12V/24V 6

2835 Hybrid 240leds/m 12V/24V 7

2835 Hybrid 240leds/m 48V 8

2835 Hybrid 2 Rows 240leds/m 12V/24V 9

2835 Hybrid 2 Rows 240leds/m 48V, Triplex Rows 360leds/m 12V 10

2835 Hybrid Triplex Rows 360leds/m 24V/48V 11

2835 Hybrid Four Rows 480leds/m 12V/24V 12

2835 Hybrid Four Rows 480leds/m 48V, Five Rows 600leds/m 12V 13

2835 Hybrid Five Rows 600leds/m 24/48V 14

2835 Hybrid Six Rows 720leds/m 12/24V 15

2835 Hybrid Six Rows 720leds/m 48V 16

5730 Hybrid 120leds/m 12V/24V 17

5730 Hybrid 240leds/m 12V/24V 18

3014 Hybrid 120leds/m 12V/24V 19

3014 Hybrid 240leds/m 12V/24V 20

3014 Hybrid 364leds/m 24V 21

3020 Hybrid 120leds/m 12V/24V 22

3020 Hybrid 168leds/m 12V/24V 23

3020 Hybrid 240leds/m 12V/24V 24

3020 Hybrid 240leds/m 48V, 320leds/m 24V 25

3020 Hybrid 320leds/m 48V, 360leds/m 12V 26

3020 Hybrid 360leds/m 24V/48V 27

3020 Hybrid 560leds/m 48V 28

2216 Hybrid 240leds/m 12V/24V 29

2216 Hybrid 360leds/m 12V/24V 30





2216 Hybrid 560leds/m 24V 31

CINEMA Hybrid(Bi-Color/CCT) Flex LED Strip Series

CINEMA Hybrid/Bi-Color/CCT Flex LED Strip Series is the most popular led strip in our CINEMA strip family.





For the CINEMA Hybrid/Bi-Color/CCT Flex LED Strip Series use flame/tungsten CCT from 2000K-3500K, combined with daylight sources CCT from 5000K with 10000K and among, high CRI 95+, with full spectrum R1-R15 all above 90, all TLCI>95.

We offer different option with 2835/5730/3014/3020/2216 single Tungsten and Daylight combined version. Cuttable with DC12V, DC24V, DC48V and different density with single row and multi-rows for choice, with 120 degree view angle allows for soft, even output even at close distances. Extremely vrsatile, light-weight, color-correct, and economical make all these LED strip a hit with cinematographers and DOPs alike.

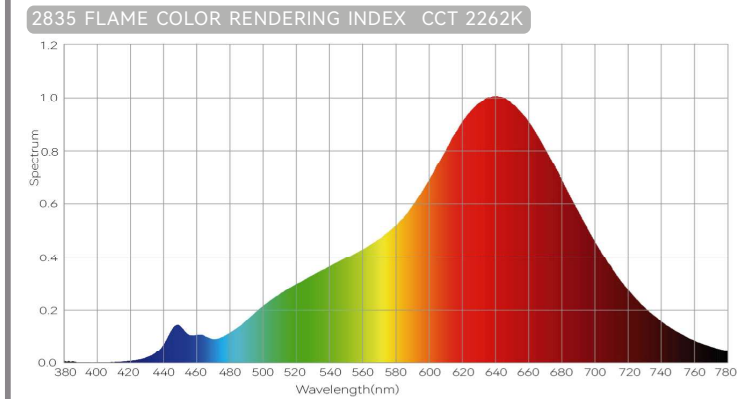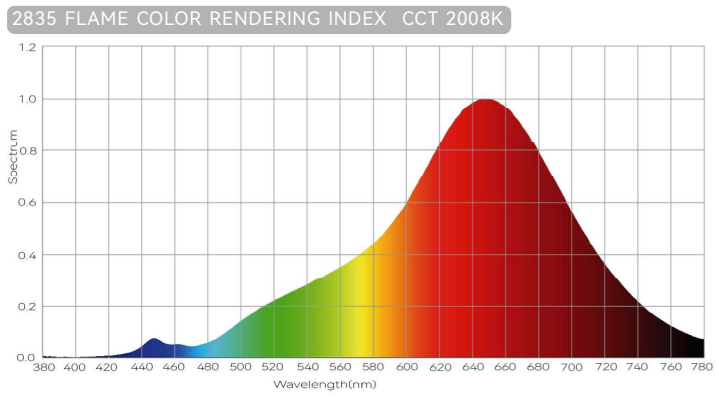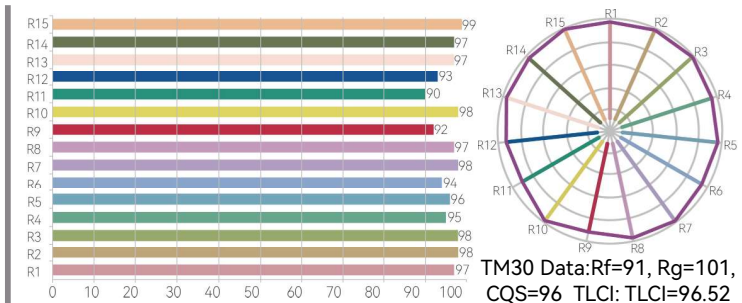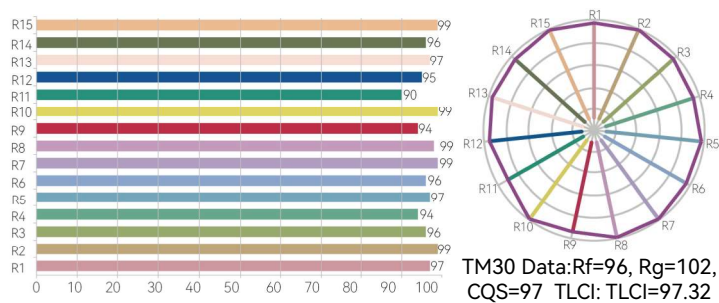

2835 FLAME COLOR SPECTRUM & WAVELENGTH CCT 2008K Ra=97.1



2835 FLAME COLOR SPECTRUM & WAVELENGTH CCT 2262K Ra=96.6

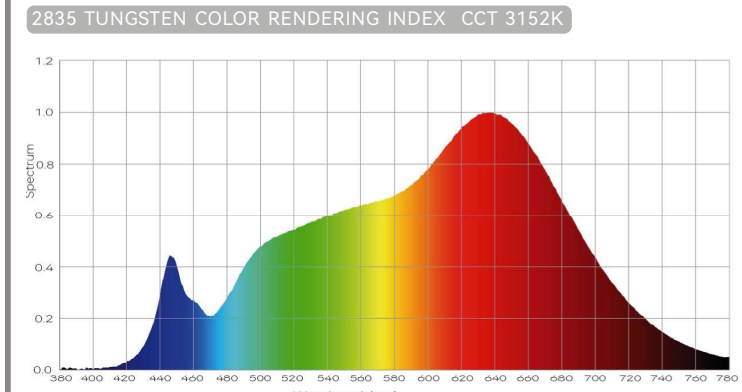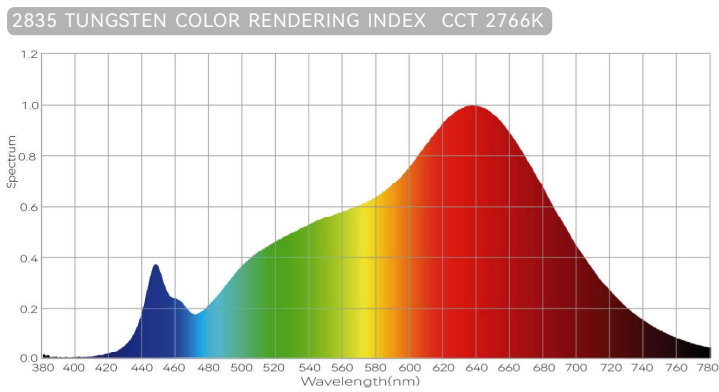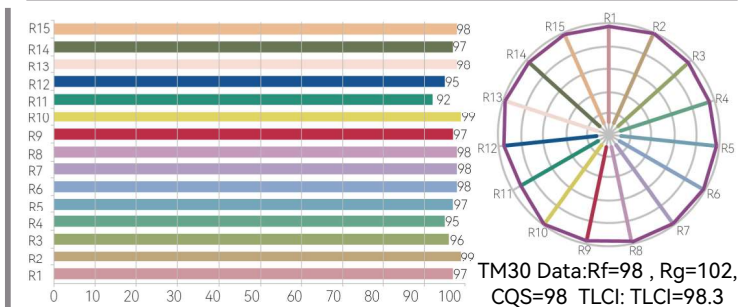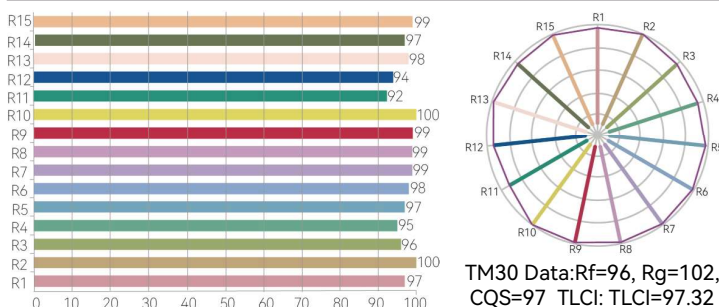


2835 TUNGSTEN COLOR SPECTRUM & WAVELENGTH CCT 2766K

2835 TUNGSTEN COLOR SPECTRUM & WAVELENGTH CCT 3152K




CINEMA Hybrid(Bi-Color/CCT) Flex LED Strip Series

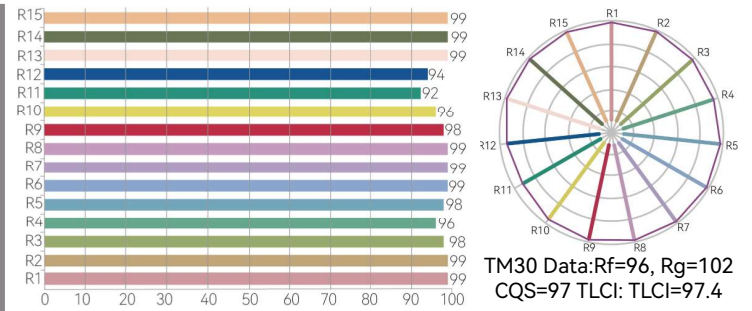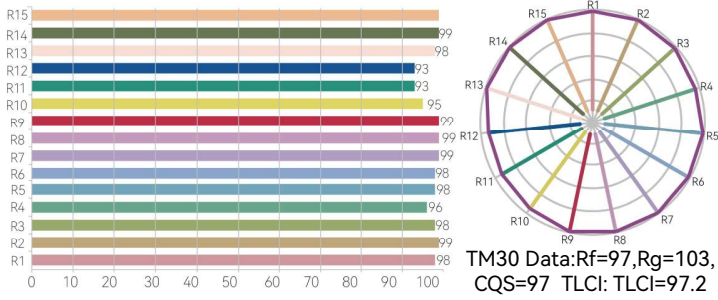


2835 DAYLIGHT COLOR RENDERING INDEX CCT 5653K

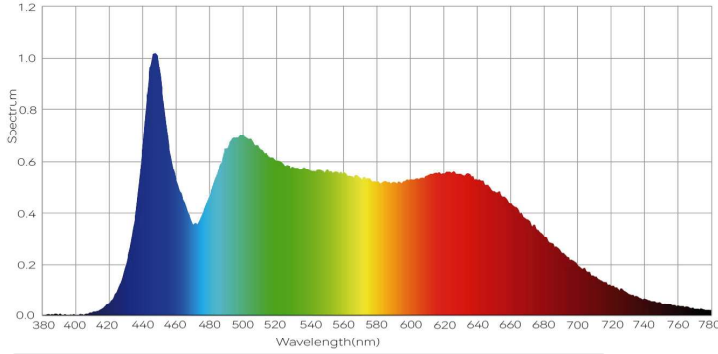


2835DAYLIGHT COLOR RENDERING INDEX CCT 6498K

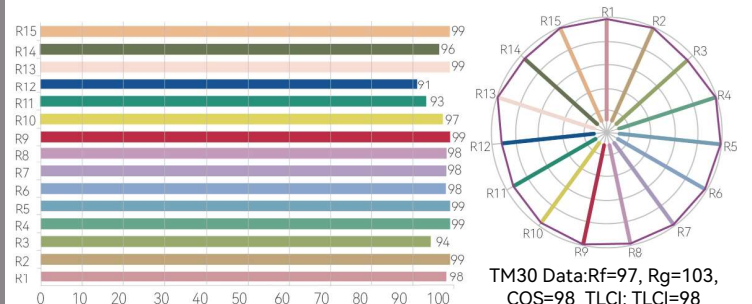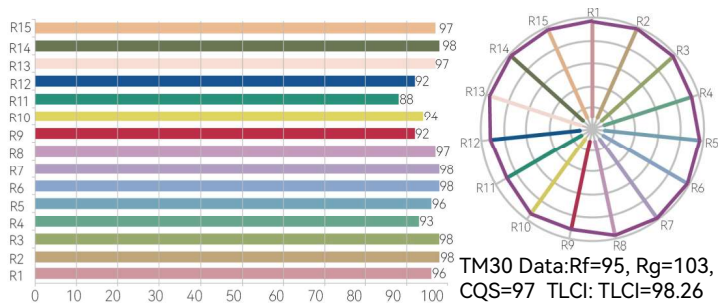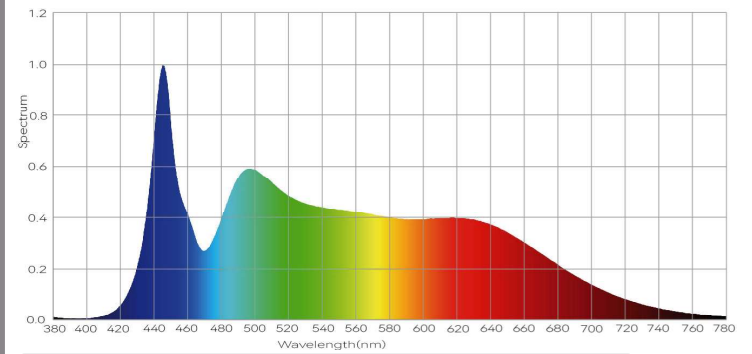


2835 BLUE DAYLIGHT COLOR RENDERING INDEX CCT 10518K

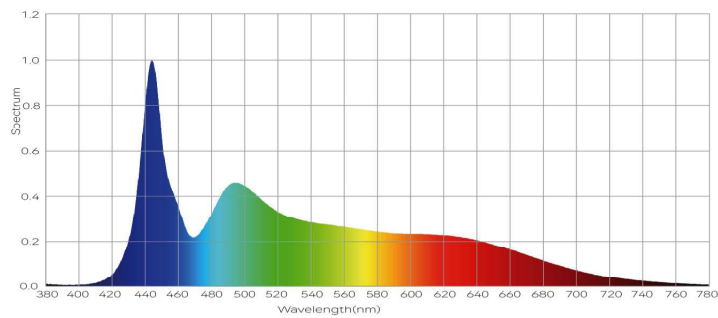


5730 TUNGSTEN COLOR RENDERING INDEX CCT 2886K Ra=97.9

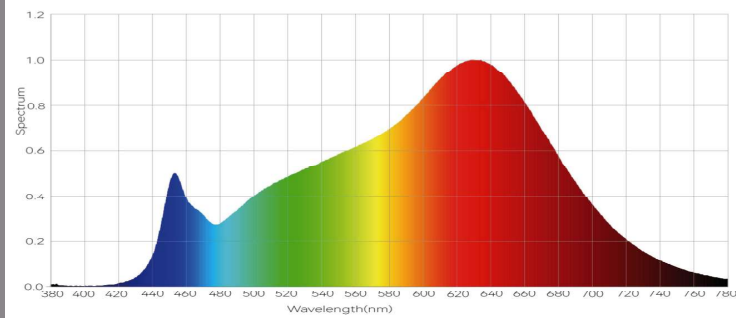


CINEMA Hybrid(Bi-Color/CCT) Flex LED Strip Series

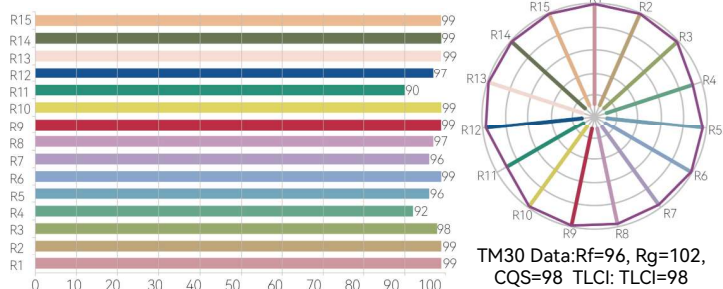


5730 DAYLIGHT COLOR RENDERING INDEX CCT 5597K Ra=97.1

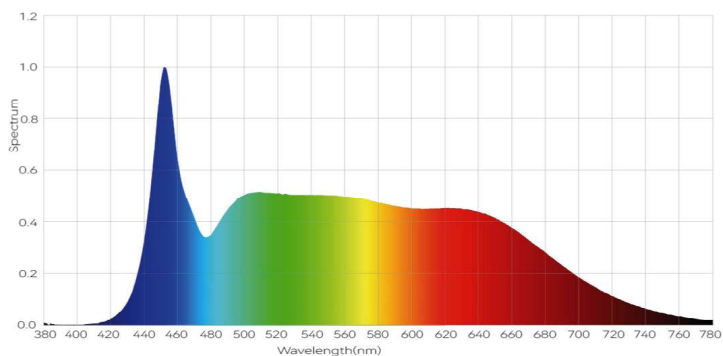

5730 DAYLIGHT COLOR SPECTRUM & WAVELENGTH CCT 5597K Ra=97.1

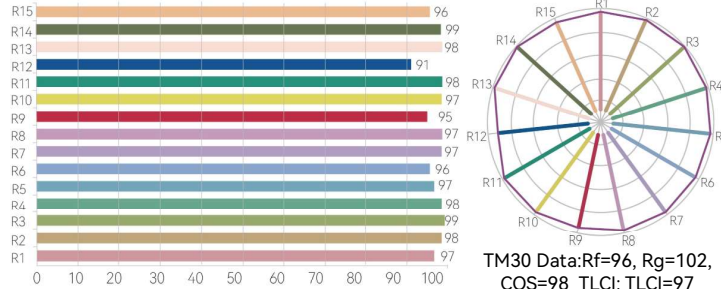

5730 DAYLIGHT COLOR RENDERING INDEX CCT 6560K Ra=97.7

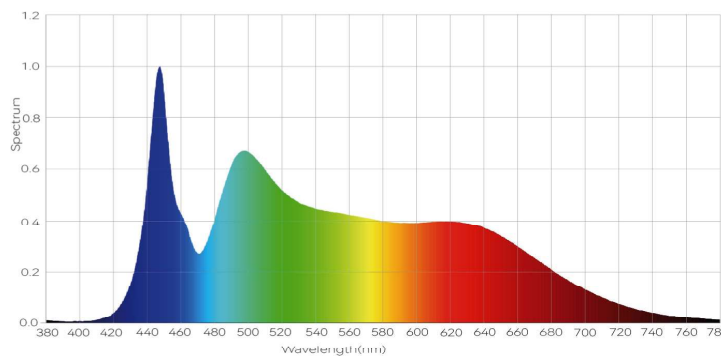


5730 DAYLIGHT COLOR SPECTRUM & WAVELENGTH CCT 6560K Ra=97.7

Special Remarks:





1. Due to tolerance of testing equipment, the actual parameters may have difference with the parameters in this catalogue.
2. The parameters of current, power, lumen etc. is based on 1 meter.
3. High Power! Using with heat dissipation device is recommended. Do not long time working with full color!
4. For parameters mentioned with UL means product made with UL Certification, Non-UL is the product not asked for UL Certification.
5. The parameters of product are subject to changes without prior notice.

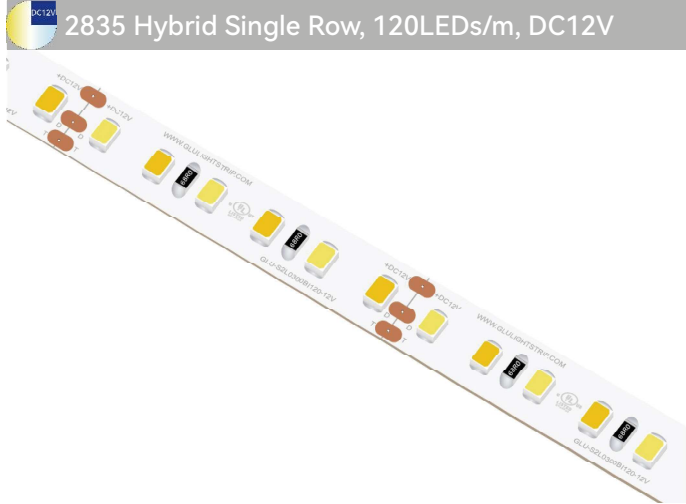



Product Code: GLUA12CV010L0300BI03W120C3
 Part No.: GLU-S2L0300BI120-12V
 LED Qty.: 120pcs
 Working Voltage: DC12V
 Power: 24W/m
 Current: 2A
 Beam Angle: 120°
 Dimension(UL Standard): 2500×10×1.3mm(98.43×0.39×0.051in.)
 Dimension(Non-UL Standard): 5000×10×1.3mm(196.85×0.39×0.051in.)
 Mini Cuttable Size: 50×10mm(1.97×0.39in.)
 Operating Temperature: -20° C to +50° C
 IP Grade: IP20
 Standard Connector: 3Pin Bared cable
 Standard Installation: 3M 9080HL Back adhesive
 Life Span:50,000 Hrs
 Certification: UL/CUL Listed, CE Compliant

12VDC Bi-color, DC12V
 CCT Whites: 2000-10000K
 Typical CCT Whites: 2800K(Tungsten)/6500K(Daylight)
 CRI Whites: 95+(Tungsten)/95+(Daylight)
 TLCI Whites: 95+(Tungsten)/95+(Daylight)
 TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)
 Lumens (Typical): 960(Tungsten)/1080(Daylight)

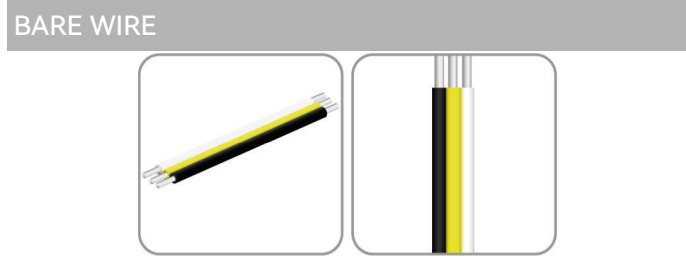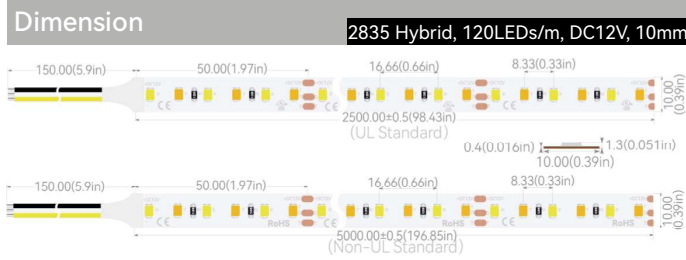

Product Code: GLUA24CV010L0300BI06W120C3
 Part No.: GLU-S2L0300BI120-24V
 LED Qty.: 120pcs
 Working Voltage: DC24V
 Power: 24W/m
 Current: 1A
 Beam Angle: 120°
 Dimension(UL Standard): 4000×10×1.3mm(157.48×0.39×0.051in.)
 Dimension(Non-UL Standard): 5000×10×1.3mm(196.85×0.39×0.051in.)
 Mini Cuttable Size: 100×10mm(3.94×0.39in.)
 Operating Temperature: -20° C to +50° C
 IP Grade: IP20
 Standard Connector: 3Pin Bared cable
 Standard Installation: 3M 9080HL Back adhesive
 Life Span:50,000 Hrs
 Certification: UL/CUL Listed, CE Compliant

24VDC Bi-color, DC24V
 CCT Whites: 2000-10000K
 Typical CCT Whites: 2800K(Tungsten)/6500K(Daylight)
 CRI Whites: 95+(Tungsten)/95+(Daylight)
 TLCI Whites: 95+(Tungsten)/95+(Daylight)
 TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)
 Lumens (Typical): 960(Tungsten)/1080(Daylight)

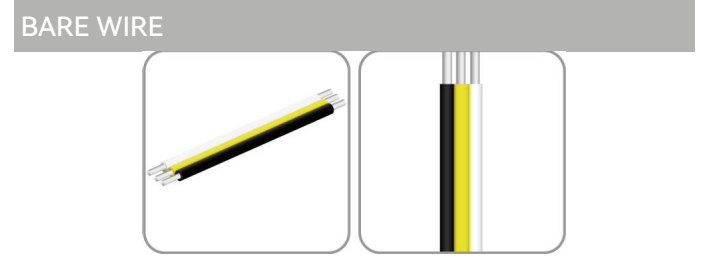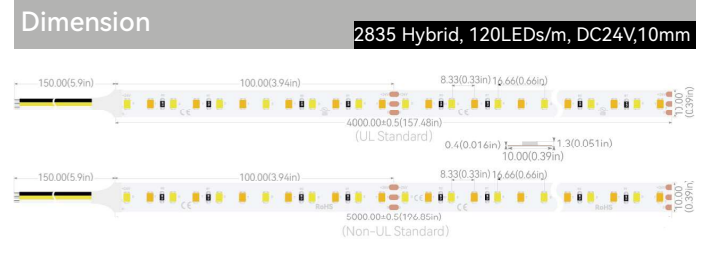





2835 Hybrid Single Row, 168LEDs/m, DC12V

Product Code: GLUA12CV010L0300BI03W168C3
 Part No.: GLU-S2L0300BI168-12V
 LED Qty.: 168pcs
 Working Voltage: DC12V
 Power: 28W/m
 Current: 2.35A
 Beam Angle: 120°
 Dimension(UL Standard): 2000×10×1.3mm(78.74×0.39×0.051in.)
 Dimension(Non-UL Standard): 5000×10×1.3mm(196.85×0.39×0.051in.)
 Mini Cuttable Size: 35.71×10mm(1.41×0.39in.)
 Operating Temperature: -20° C to +50° C
 IP Grade: IP20
 Standard Connector: 3Pin Bared cable
 Standard Installation: 3M 9080HL Back adhesive
 Life Span:50,000 Hrs
 Certification: UL/CUL Listed, CE Compliant

12VDC Bi-color, DC12V

CCT Whites: 2000-10000K
 Typical CCT Whites: 2800K(Tungsten)/6500K(Daylight)
 CRI Whites: 95+(Tungsten)/95+(Daylight)
 TLCI Whites: 95+(Tungsten)/95+(Daylight)
 TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)
 Lumens (Typical): 1210(Tungsten)/1290(Daylight)

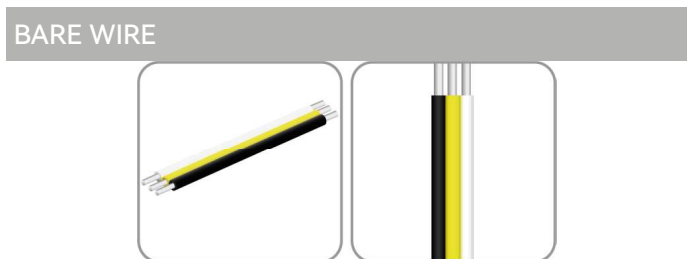
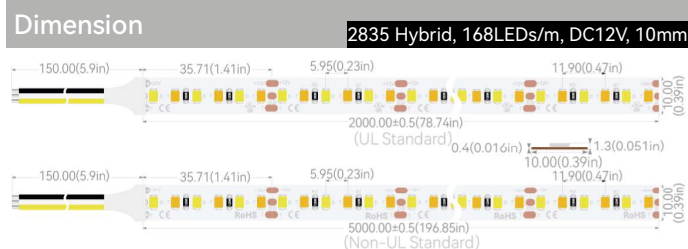



2835 Hybrid Single Row, 168LEDs/m, DC24V

Product Code: GLUA24CV010L0300BI06W168C3
 Part No.: GLU-S2L0300BI168-24V
 LED Qty.: 168pcs
 Working Voltage: DC24V
 Power: 28W/m
 Current: 1.17A
 Beam Angle: 120°
 Dimension(UL Standard): 3500×10×1.3mm(137.8×0.39×0.051in.)
 Dimension(Non-UL Standard): 5000×10×1.3mm(196.85×0.39×0.051in.)
 Mini Cuttable Size: 71.43×10mm(2.81×0.39in.)
 Operating Temperature: -20° C to +50° C
 IP Grade: IP20
 Standard Connector: 3Pin Bared cable
 Standard Installation: 3M 9080HL Back adhesive
 Life Span:50,000 Hrs
 Certification: UL/CUL Listed, CE Compliant

24VDC Bi-color, DC24V

CCT Whites: 2000-10000K
 Typical CCT Whites: 2800K(Tungsten)/6500K(Daylight)
 CRI Whites: 95+(Tungsten)/95+(Daylight)
 TLCI Whites: 95+(Tungsten)/95+(Daylight)
 TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)
 Lumens (Typical): 1210(Tungsten)/1290(Daylight)

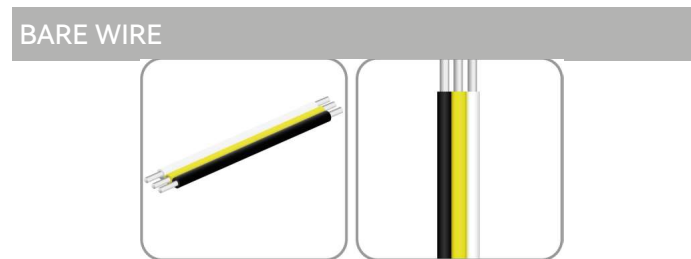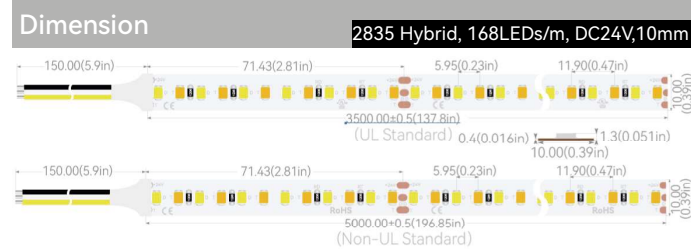



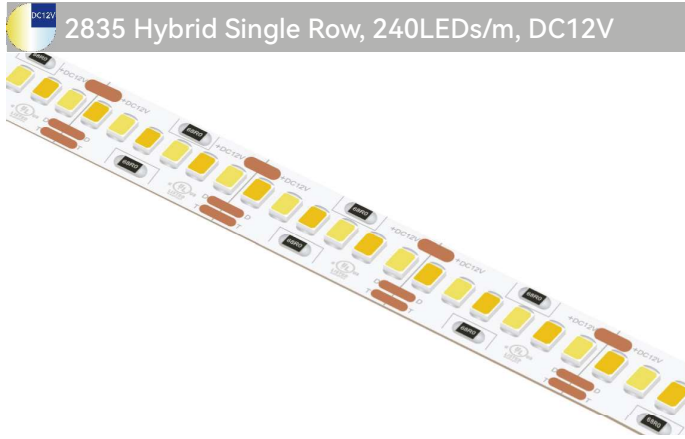


2835 Hybrid Single Row, 240LEDs/m, DC12V

Product Code: GLUA12CV012L0300BI03W240C3
 Part No.: GLU-S2L0300BI240-12V
 LED Qty.: 240pcs
 Working Voltage: DC12V
 Power: 43.2W/m
 Current: 3.6A
 Beam Angle: 120°
 Dimension(UL Standard): 1500×12×1.3mm(59.06×0.47×0.051in.)
 Dimension(Non-UL Standard): 5000×12×1.3mm(196.85×0.47×0.051in.)
 Mini Cuttable Size: 25×12mm(0.98×0.47in.)
 Operating Temperature: -20° C to +50° C
 IP Grade: IP20
 Standard Connector: 3Pin Bared cable
 Standard Installation: 3M 9080HL Back adhesive
 Life Span:50,000 Hrs
 Certification: UL/CUL Listed, CE Compliant

12VDC Bi-color, DC12V

CCT Whites: 2000-10000K
 Typical CCT Whites: 2800K(Tungsten)/6500K(Daylight)
 CRI Whites: 95+(Tungsten)/95+(Daylight)
 TLCI Whites: 95+(Tungsten)/95+(Daylight)
 TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)
 Lumens (Typical): 1740(Tungsten)/1960(Daylight)

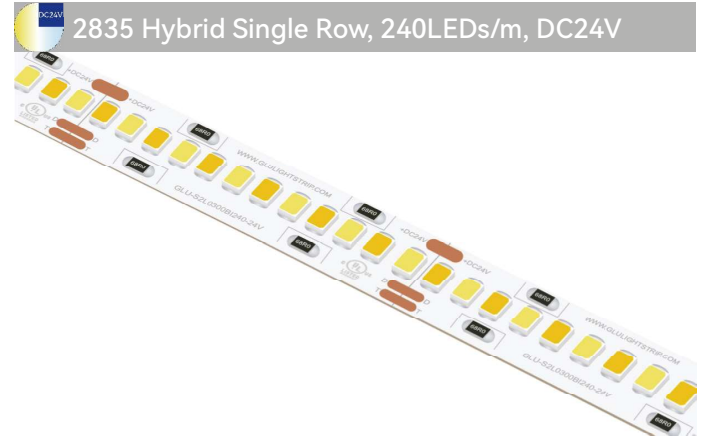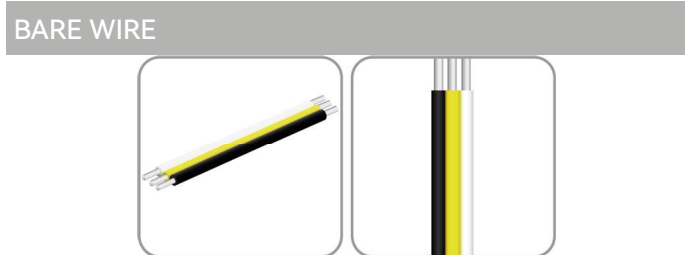
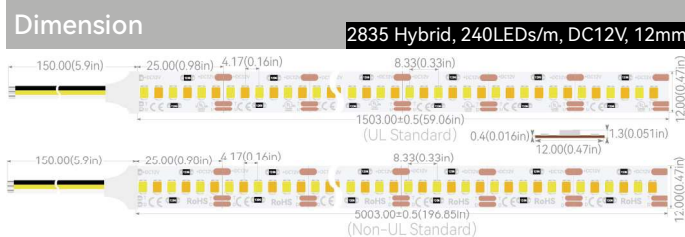


2835 Hybrid Single Row, 240LEDs/m, DC24V

Product Code: GLUA24CV012L0300BI06W240C3
 Part No.: GLU-S2L0300BI240-24V
 LED Qty.: 240pcs
 Working Voltage: DC24V
 Power: 43.2W/m
 Current: 1.8A
 Beam Angle: 120°
 Dimension(UL Standard): 2500×12×1.3mm(98.43×0.39×0.051in.)
 Dimension(Non-UL Standard): 5000×12×1.3mm(196.85×0.47×0.051in.)
 Mini Cuttable Size: 50×12mm(1.97×0.47in.)
 Operating Temperature: -20° C to +50° C
 IP Grade: IP20
 Standard Connector: 3Pin Bared cable
 Standard Installation: 3M 9080HL Back adhesive
 Life Span:50,000 Hrs
 Certification: UL/CUL Listed, CE Compliant

24VDC Bi-color, DC24V

CCT Whites: 2000-10000K
 Typical CCT Whites: 2800K(Tungsten)/6500K(Daylight)
 CRI Whites: 95+(Tungsten)/95+(Daylight)
 TLCI Whites: 95+(Tungsten)/95+(Daylight)
 TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)
 Lumens (Typical): 1740(Tungsten)/1960(Daylight)

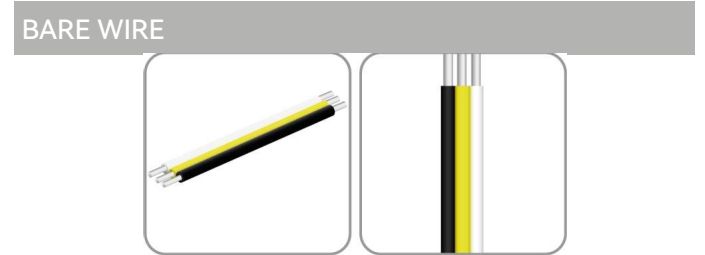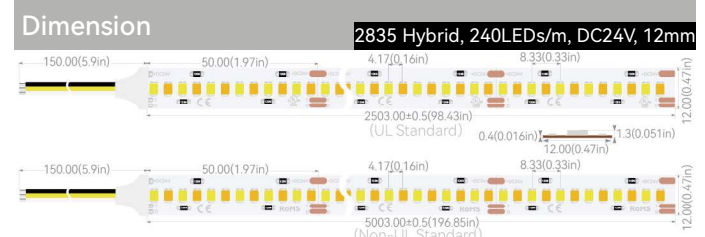

2835 Hybrid Single Row, 240LEDs/m, DC48V




Product Code: GLUA48CV012L0300BI12W240C3
Part No.: GLU-S2L0300BI240-48V
LED Qty.: 240pcs
Working Voltage: DC12V
Power: 43.2W/m
Current: 0.9A
Beam Angle: 120°
Dimension(UL Standard): 2500×12×1.3mm(98.43×0.47×0.051in.)
Dimension(Non-UL Standard): 5000×12×1.3mm(196.85×0.47×0.051in.)
Mini Cuttable Size: 100×12mm(3.94×0.47in.)
Operating Temperature: -20° C to +50° C
IP Grade: IP20
Standard Connector: 3Pin Bared cable
Standard Installation: 3M 9080HL Back adhesive
Life Span:50,000 Hrs
Certification: UL/CUL Listed, CE Compliant


48VDC Bi-color, DC48V

CCT Whites: 2000-10000K
Typic CCT Whites: 2800K(Tungsten)/6500K(Daylight)
CRI Whites: 95+(Tungsten)/95+(Daylight)
TLCI Whites: 95+(Tungsten)/95+(Daylight)
TM-30 Data Whites: Rf>95, Rg>102, CQS>97(Tungsten/Daylight)
Lumens (Typical): 1740(Tungsten)/1960(Daylight)

Dimension 2835 Hybrid, 240LEDs/m, DC48V, 12mm

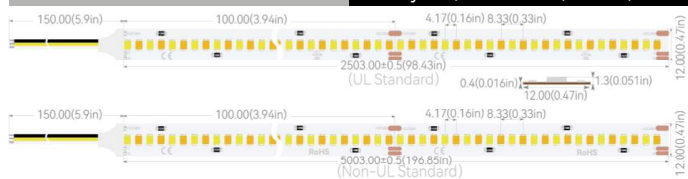


BARE WIRE

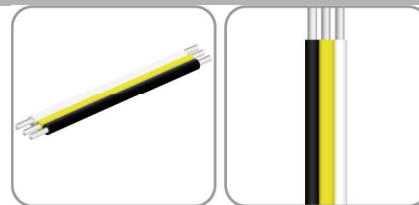




CINEMA Hybrid(Bi-color/CCT) Flex LED Strip Series

2835 Hybrid Multi-rows Series

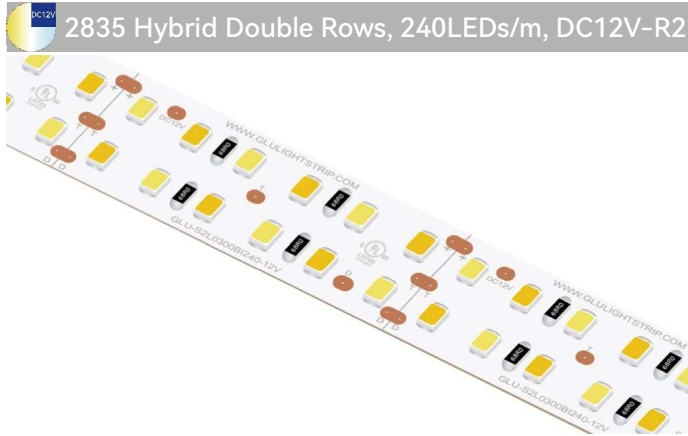



Product Code: GLUA12CV016L0300BI03W240C3
Part No.: GLU-S2L0300BI240-12V
LED Qty.: 240pcs
Working Voltage: DC12V
Power: 33.6W/m
Current: 2.8A
Beam Angle: 120°
Dimension(UL Standard): 1500×16×1.3mm(59.06×0.63×0.051in.)
Dimension(Non-UL Standard): 4000×16×1.3mm(157.48×0.63×0.051in.)
Mini Cuttable Size: 50×16mm(1.97×0.63in.)
Operating Temperature: -20° C to +50° C
IP Grade: IP20
Standard Connector: 3Pin Bared cable
Standard Installation: 3M 9080HL Back adhesive
Life Span:50,000 Hrs
Certification: UL/CUL Listed, CE Compliant

12VDC Bi-color, DC12V
CCT Whites: 2000-10000K
Typic CCT Whites: 2800K(Tungsten)/6500K(Daylight)
CRI Whites: 95+(Tungsten)/95+(Daylight)
TLCI Whites: 95+(Tungsten)/95+(Daylight)
TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)
Lumens (Typical): 1380(Tungsten)/1550(Daylight)

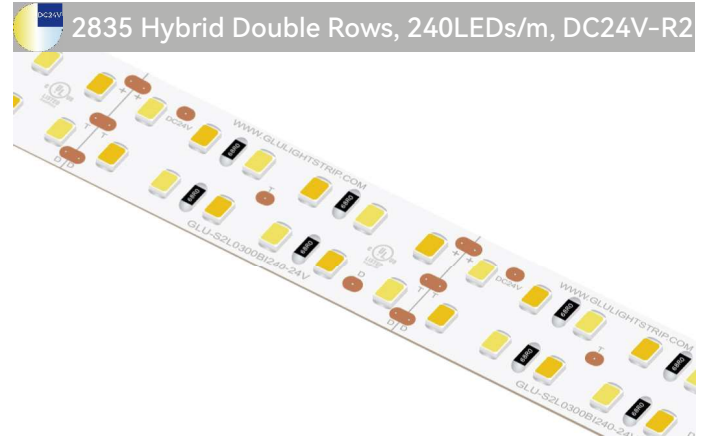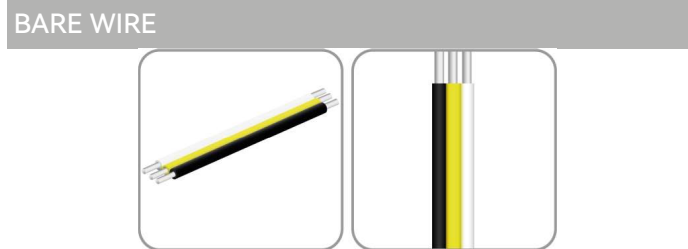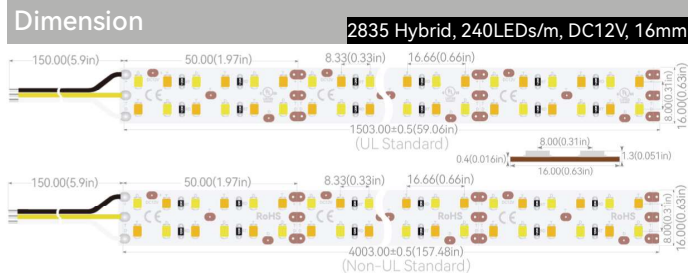

Product Code: GLUA24CV016L0300BI06W240C3
Part No.: GLU-S2L0300BI240-24V
LED Qty.: 240pcs
Working Voltage: DC24V
Power: 33.6W/m
Current: 1.4A
Beam Angle: 120°
Dimension(UL Standard): 3000×16×1.3mm(118.11×0.63×0.051in.)
Dimension(Non-UL Standard): 4000×16×1.3mm(157.48×0.63×0.051in.)
Mini Cuttable Size: 50×16mm(1.97×0.63in.)
Operating Temperature: -20° C to +50° C
IP Grade: IP20
Standard Connector: 3Pin Bared cable
Standard Installation: 3M 9080HL Back adhesive
Life Span:50,000 Hrs
Certification: UL/CUL Listed, CE Compliant

24VDC Bi-color, DC24V
CCT Whites: 2000-10000K
Typic CCT Whites: 2800K(Tungsten)/6500K(Daylight)
CRI Whites: 95+(Tungsten)/95+(Daylight)
TLCI Whites: 95+(Tungsten)/95+(Daylight)
TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)
Lumens (Typical): 1380(Tungsten)/1550(Daylight)

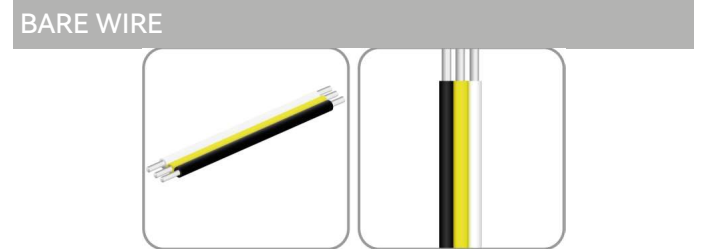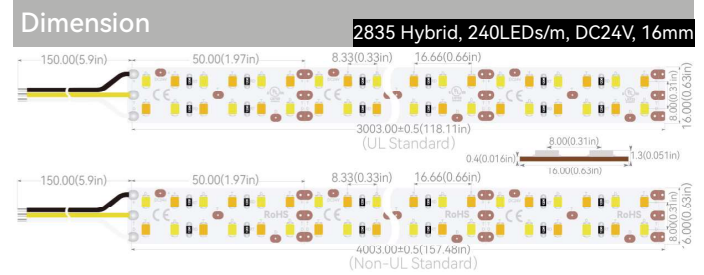

2835 Hybrid Double Rows, 240LEDs/m, DC48V-R2




Product Code: GLUA48CV016L0300BI12W240C3
Part No.: GLU-S2L0300BI240-48V
LED Qty.: 240pcs
Working Voltage: DC48V
Power: 33.6W/m
Current: 0.7A
Beam Angle: 120°
Dimension(UL Standard): 3000×16×1.3mm(118.11×0.63×0.051in.)
Dimension(Non-UL Standard):4000×16×1.3mm(157.48×0.63×0.051in.)
Mini Cuttable Size: 100×16mm(3.94×0.63in.)
Operating Temperature: -20° C to +50° C
IP Grade: IP20
Standard Connector: 3Pin Bared cable
Standard Installation: 3M 9080HL Back adhesive
Life Span:50,000 Hrs
Certification: UL/CUL Listed, CE Compliant


48VDC Bi-color, DC48V

CCT Whites: 2000-10000K
Typic CCT Whites: 2800K(Tungsten)/6500K(Daylight)
CRI Whites: 95+(Tungsten)/95+(Daylight)
TLCI Whites: 95+(Tungsten)/95+(Daylight)
TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)
Lumens (Typical): 1380(Tungsten)/1550(Daylight)


Dimension 2835 Hybrid, 240LEDs/m, DC48V, 16mm

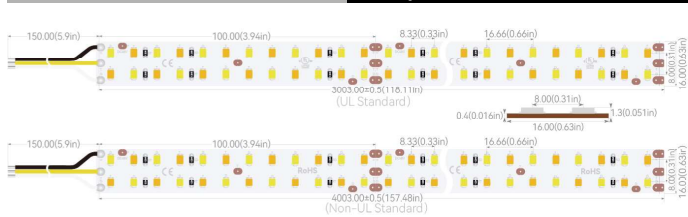

BARE WIRE

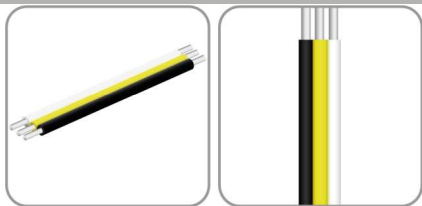

2835 Hybrid Triplex Rows, 360LEDs/m, DC12V-R3

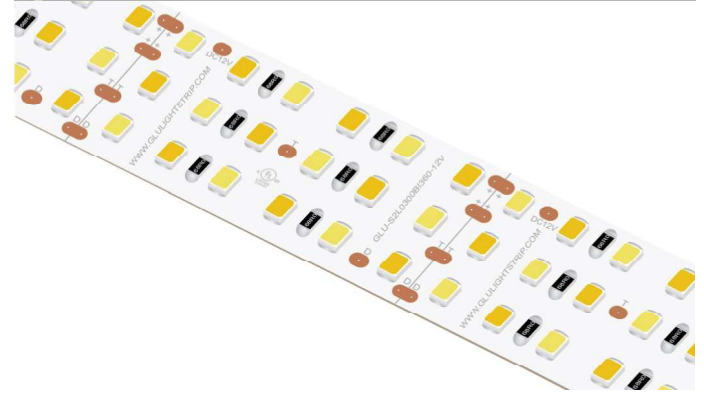


Product Code: GLUA12CV024L0300BI03W360C3
Part No.: GLU-S2L0300BI360-12V
LED Qty.: 360pcs
Working Voltage: DC12V
Power: 50.4W/m
Current: 4.2A
Beam Angle: 120°
Dimension(UL Standard): 1000×24×1.3mm(39.37×0.94×0.051in.)
Dimension(Non-UL Standard): 3000×24×1.3mm(118.11×0.94×0.051in.)
Mini Cuttable Size: 50×24mm(1.97×0.94in.)
Operating Temperature: -20° C to +50° C
IP Grade: IP20
Standard Connector: 3Pin Bared cable
Standard Installation: 3M 9080HL Back adhesive
Life Span:50,000 Hrs
Certification: UL/CUL Listed, CE Compliant


12VDC Bi-color, DC12V

CCT Whites: 2000-10000K
Typic CCT Whites: 2800K(Tungsten)/6500K(Daylight)
CRI Whites: 95+(Tungsten)/95+(Daylight)
TLCI Whites: 95+(Tungsten)/95+(Daylight)
TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)
Lumens (Typical): 2060(Tungsten)/2320(Daylight)

Dimension 2835 Hybrid, 360LEDs/m, DC12V, 24mm

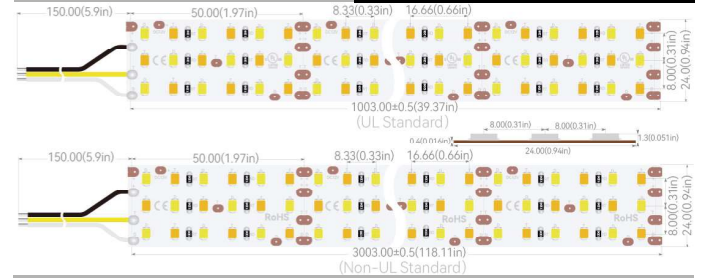

BARE WIRE

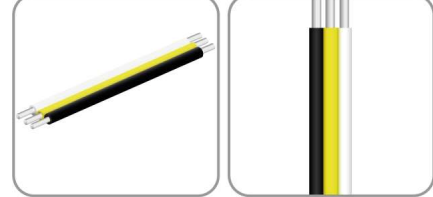

2835 Hybrid Triplex Rows, 360LEDs/m, DC24V-R3




Product Code: GLUA24CV024L0300BI06W360C3
 Part No.: GLU-S2L0300BI360-24V
 LED Qty.: 360pcs
 Working Voltage: DC24V
 Power: 50.4W/m
 Current: 2.1A
 Beam Angle: 120°
 Dimension(UL Standard): 2000×24×1.3mm(78.74×0.94×0.051in.)
 Dimension(Non-UL Standard): 3000×24×1.3mm(118.11×0.94×0.051in.)
 Mini Cuttable Size: 100×24mm(3.94×0.94in.)
 Operating Temperature: -20° C to +50° C
 IP Grade: IP20
 Standard Connector: 3Pin Bared cable
 Standard Installation: 3M 9080HL Back adhesive
 Life Span:50,000 Hrs
 Certification: UL/CUL Listed, CE Compliant


24VDC Bi-color, DC24V

CCT Whites: 2000-10000K
 Typical CCT Whites: 2800K(Tungsten)/6500K(Daylight)
 CRI Whites: 95+(Tungsten)/95+(Daylight)
 TLCI Whites: 95+(Tungsten)/95+(Daylight)
 TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)
 Lumens (Typical): 2060(Tungsten)/2320(Daylight)

Dimension 2835 Hybrid, 360LEDs/m, DC24V, 24mm

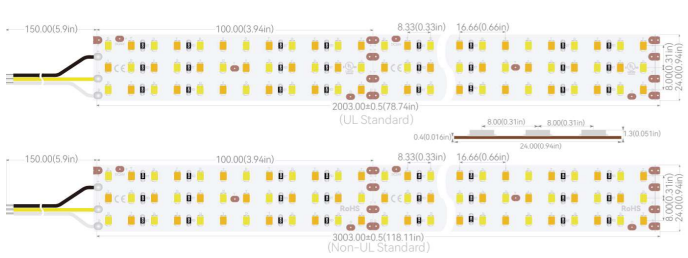

BARE WIRE

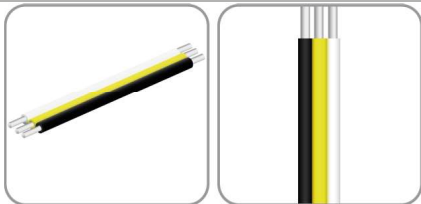

2835 Hybrid Triplex Rows, 360LEDs/m, DC48V-R3




Product Code: GLUA48CV024L0300BI15W360C3
 Part No.: GLU-S2L0300BI360-48V
 LED Qty.: 360pcs
 Working Voltage: DC48V
 Power: 40.32W/m
 Current: 0.84A
 Beam Angle: 120°
 Dimension(UL Standard): 2500×24×1.3mm(98.43×0.94×0.051in.)
 Dimension(Non-UL Standard): 3000×24×1.3mm(118.11×0.94×0.051in.)
 Mini Cuttable Size: 83.33×24mm(3.28×0.94in.)
 Operating Temperature: -20° C to +50° C
 IP Grade: IP20
 Standard Connector: 3Pin Bared cable
 Standard Installation: 3M 9080HL Back adhesive
 Life Span:50,000 Hrs
 Certification: UL/CUL Listed, CE Compliant


48VDC Bi-color, DC48V


CCT Whites: 2000-10000K
 Typical CCT Whites: 2800K(Tungsten)/6500K(Daylight)
 CRI Whites: 95+(Tungsten)/95+(Daylight)
 TLCI Whites: 95+(Tungsten)/95+(Daylight)
 TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)
 Lumens (Typical): 2060(Tungsten)/2320(Daylight)

Dimension 2835 Hybrid, 360LEDs/m, DC48V, 24mm

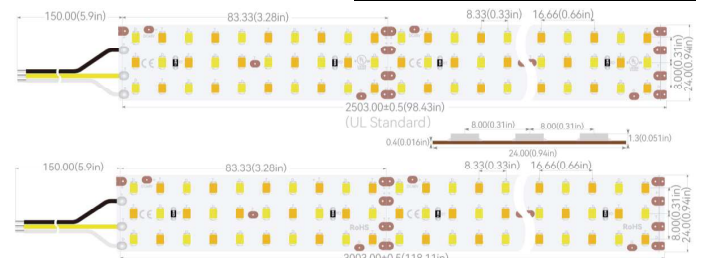




BARE WIRE

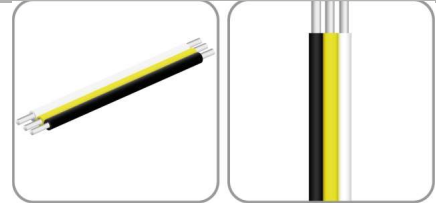

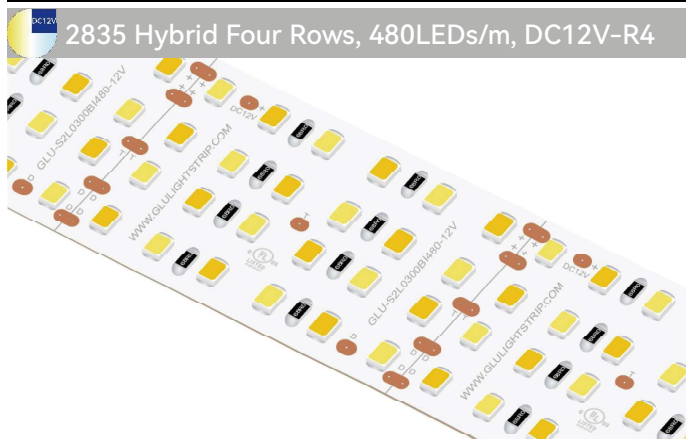



Product Code: GLUA12CV032L0300BI03W480C3
Part No.: GLU-S2L0300BI480-12V
LED Qty.: 480pcs
Working Voltage: DC12V
Power: 61.4W/m
Current: 5.12A
Beam Angle: 120°
Dimension(UL Standard): 1000×32×1.3mm(39.37×1.26×0.051in.)
Dimension(Non-UL Standard): 2500×32×1.3mm(98.43×1.26×0.051in.)
Mini Cuttable Size: 50×32mm(1.97×1.26in.)
Operating Temperature: -20° C to +50° C
IP Grade: IP20
Standard Connector: 3Pin Bared cable
Standard Installation: 3M 9080HL Back adhesive
Life Span:50,000 Hrs
Certification: UL/CUL Listed, CE Compliant

12VDC Bi-color, DC12V
CCT Whites: 2000-10000K
Typic CCT Whites: 2800K(Tungsten)/6500K(Daylight)
CRI Whites: 95+(Tungsten)/95+(Daylight)
TLCI Whites: 95+(Tungsten)/95+(Daylight)
TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)
Lumens (Typical): 2530(Tungsten)/2850(Daylight)

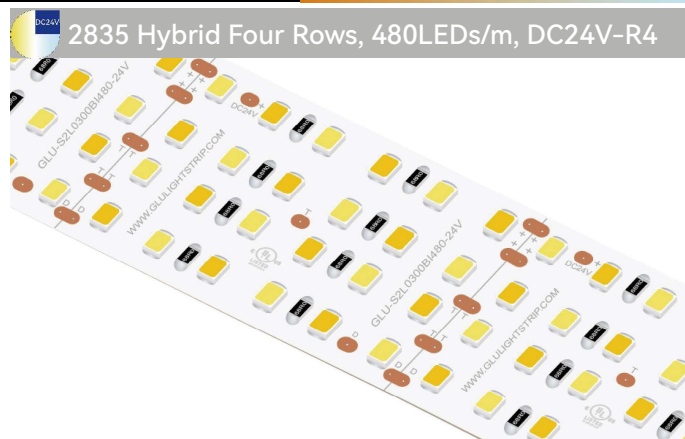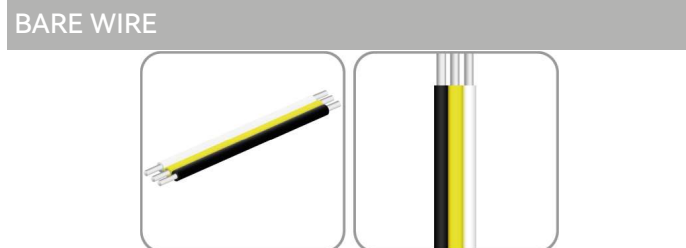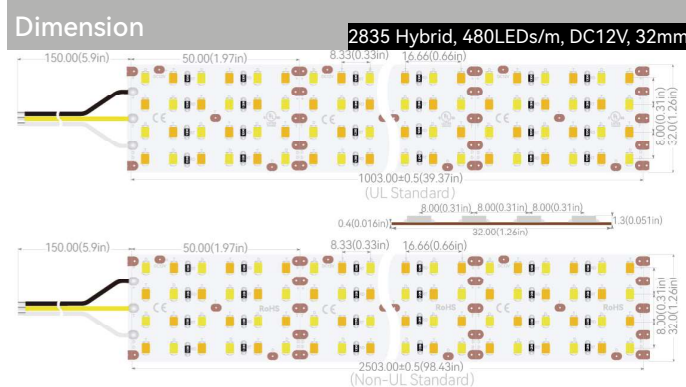


Product Code: GLUA24CV032L0300BI06W480C3
Part No.: GLU-S2L0300BI480-24V
LED Qty.: 480pcs
Working Voltage: DC24V
Power: 61.4W/m
Current: 2.56A
Beam Angle: 120°
Dimension(UL Standard): 1500×32×1.3mm(59.06×1.26×0.051in.)
Dimension(Non-UL Standard): 2500×32×1.3mm(98.43×1.26×0.051in.)
Mini Cuttable Size: 50×32mm(1.97×1.26in.)
Operating Temperature: -20° C to +50° C
IP Grade: IP20
Standard Connector: 3Pin Bared cable
Standard Installation: 3M 9080HL Back adhesive
Life Span:50,000 Hrs
Certification: UL/CUL Listed, CE Compliant

24VDC Bi-color, DC24V
CCT Whites: 2000-10000K
Typic CCT Whites: 2800K(Tungsten)/6500K(Daylight)
CRI Whites: 95+(Tungsten)/95+(Daylight)
TLCI Whites: 95+(Tungsten)/95+(Daylight)
TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)
Lumens (Typical): 2530(Tungsten)/2850(Daylight)

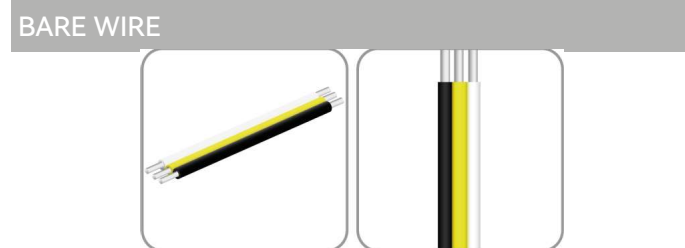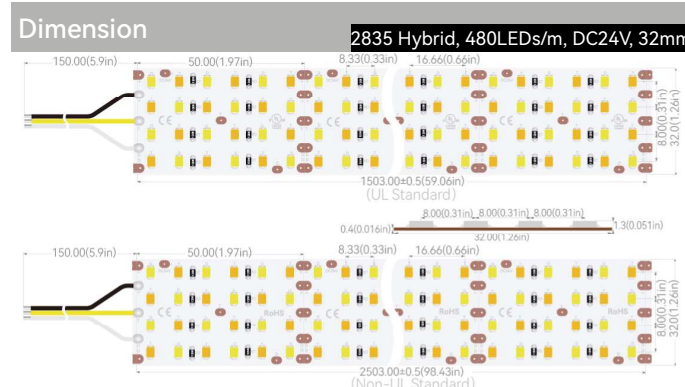




CINEMA Hybrid(Bi-Color/CCT) Flex LED Strip Series

2835 Hybrid Multi-rows Series

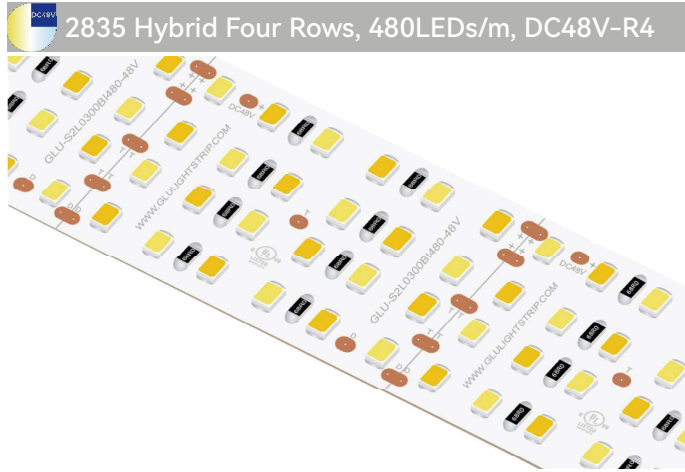



Product Code: GLUA48CV032L0300BI12W480C3
 Part No.: GLU-S2L0300BI480-48V
 LED Qty.: 480pcs
 Working Voltage: DC48V
 Power: 61.4W/m
 Current: 1.28A
 Beam Angle: 120°
 Dimension(UL Standard): 1500×32×1.3mm(59.06×1.26×0.051in.)
 Dimension(Non-UL Standard): 2500×32×1.3mm(98.43×1.26×0.051in.)
 Mini Cuttable Size: 50×32mm(1.97×1.26in.)
 Operating Temperature: -20° C to +50° C
 IP Grade: IP20
 Standard Connector: 3Pin Bared cable
 Standard Installation: 3M 9080HL Back adhesive
 Life Span:50,000 Hrs
 Certification: UL/CUL Listed, CE Compliant

48VDC Bi-color, DC48V
 CCT Whites: 2000-10000K
 Typic CCT Whites: 2800K(Tungsten)/6500K(Daylight)
 CRI Whites: 95+(Tungsten)/95+(Daylight)
 TLCI Whites: 95+(Tungsten)/95+(Daylight)
 TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)
 Lumens (Typical): 2530(Tungsten)/2850(Daylight)

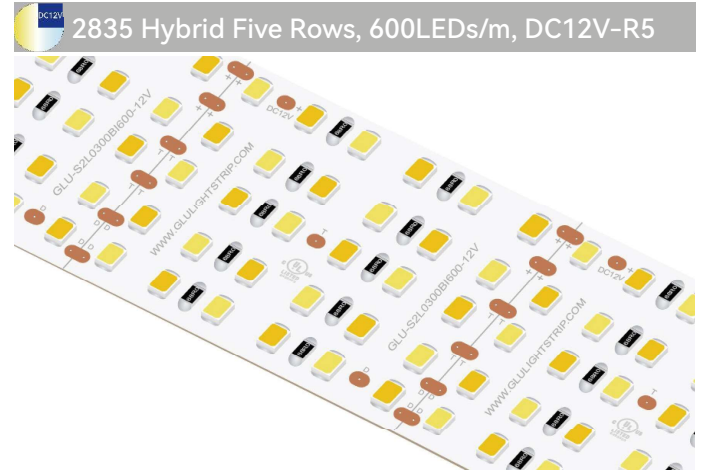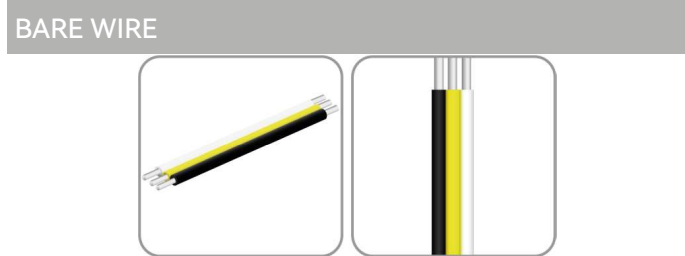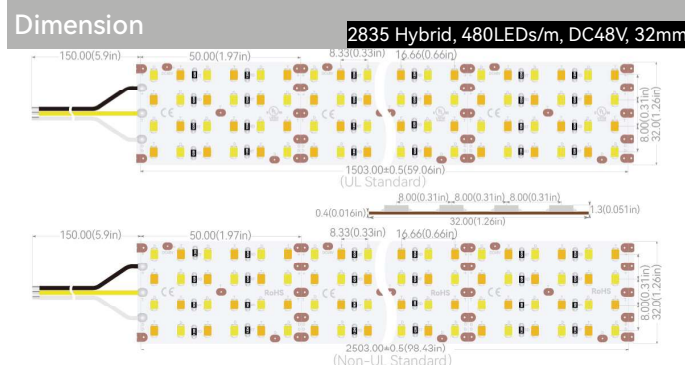


Product Code: GLUA12CV040L0300BI03W600C3
 Part No.: GLU-S2L0300BI600-12V
 LED Qty.: 600pcs
 Working Voltage: DC12V
 Power: 84W/m
 Current: 7A
 Beam Angle: 120°
 Dimension(UL Standard): 500×40×1.3mm(19.68×1.57×0.051in.)
 Dimension(Non-UL Standard): 2000×40×1.3mm(78.74×1.57×0.051in.)
 Mini Cuttable Size: 50×40mm(1.97×1.57in.)
 Operating Temperature: -20° C to +50° C
 IP Grade: IP20
 Standard Connector: 3Pin Bared cable
 Standard Installation: 3M 9080HL Back adhesive
 Life Span:50,000 Hrs
 Certification: UL/CUL Listed, CE Compliant

12VDC Bi-color, DC12V
 CCT Whites: 2000-10000K
 Typic CCT Whites: 2800K(Tungsten)/6500K(Daylight)
 CRI Whites: 95+(Tungsten)/95+(Daylight)
 TLCI Whites: 95+(Tungsten)/95+(Daylight)
 TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)
 Lumens (Typical): 3440(Tungsten)/3880(Daylight)

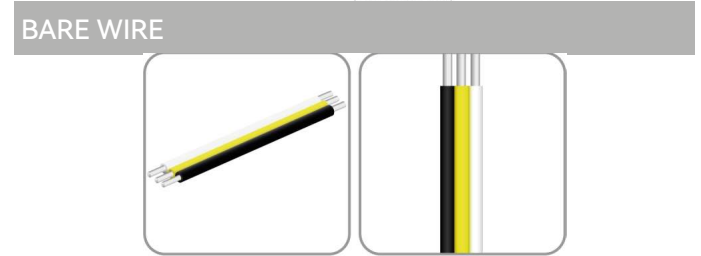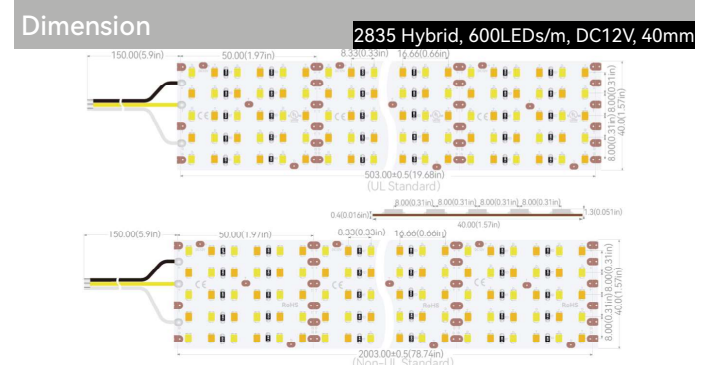



CINEMA Hybrid(Bi-Color/CCT) Flex LED Strip Series

2835 Hybrid Multi-rows Series

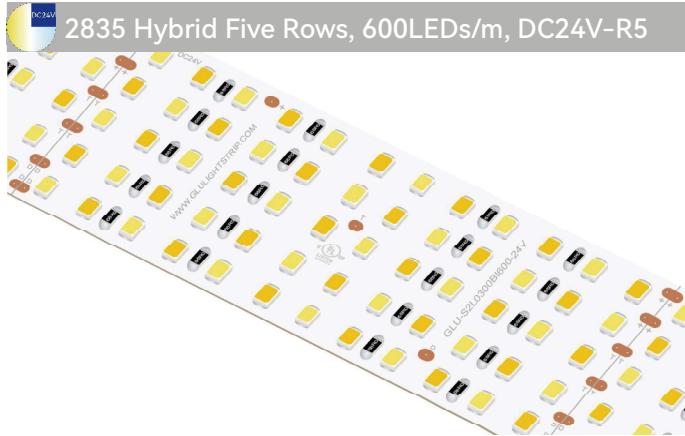



Product Code: GLUA24CV040L0300BI06W600C3
 Part No.: GLU-S2L0300BI600-24V
 LED Qty.: 600pcs
 Working Voltage: DC24V
 Power: 84W/m
 Current: 3.5A
 Beam Angle: 120°
 Dimension(UL Standard): 1000×40×1.3mm(39.37×1.57×0.051in.)
 Dimension(Non-UL Standard): 2000×40×1.3mm(78.74×1.57×0.051in.)
 Mini Cuttable Size: 100×40mm(3.94×1.57in.)
 Operating Temperature: -20° C to +50° C
 IP Grade: IP20
 Standard Connector: 3Pin Bared cable
 Standard Installation: 3M 9080HL Back adhesive
 Life Span:50,000 Hrs
 Certification: UL/CUL Listed, CE Compliant


24VDC Bi-color, DC24V
 CCT Whites: 2000-10000K
 Typic CCT Whites: 2800K(Tungsten)/6500K(Daylight)
 CRI Whites: 95+(Tungsten)/95+(Daylight)
 TLCI Whites: 95+(Tungsten)/95+(Daylight)
 TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)
 Lumens (Typical): 3440(Tungsten)/3880(Daylight)

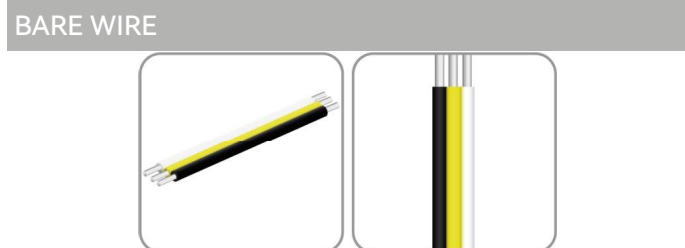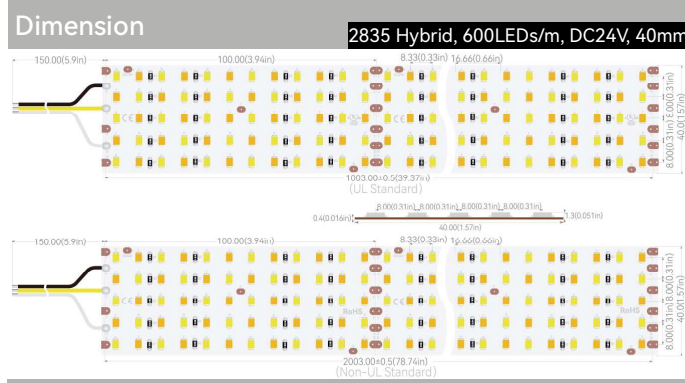

Product Code: GLUA48CV040L0300BI15W600C3
 Part No.: GLU-S2L0300BI600-48V
 LED Qty.: 600pcs
 Working Voltage: DC48V
 Power: 67.2W/m
 Current: 1.4A
 Beam Angle: 120°
 Dimension(UL Standard): 1500×40×1.3mm(59.06×1.57×0.051in.)
 Dimension(Non-UL Standard): 2000×40×1.3mm(78.74×1.57×0.051in.)
 Mini Cuttable Size: 100×40mm(3.04×1.57in.)
 Operating Temperature: -20° C to +50° C
 IP Grade: IP20
 Standard Connector: 3Pin Bared cable
 Standard Installation: 3M 9080HL Back adhesive
 Life Span:50,000 Hrs
 Certification: UL/CUL Listed, CE Compliant

48VDC Bi-color, DC48V
 CCT Whites: 2000-10000K
 Typic CCT Whites: 2800K(Tungsten)/6500K(Daylight)
 CRI Whites: 95+(Tungsten)/95+(Daylight)
 TLCI Whites: 95+(Tungsten)/95+(Daylight)
 TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)
 Lumens (Typical): 3440(Tungsten)/3880(Daylight)

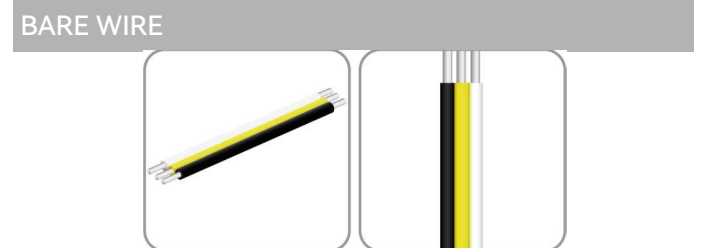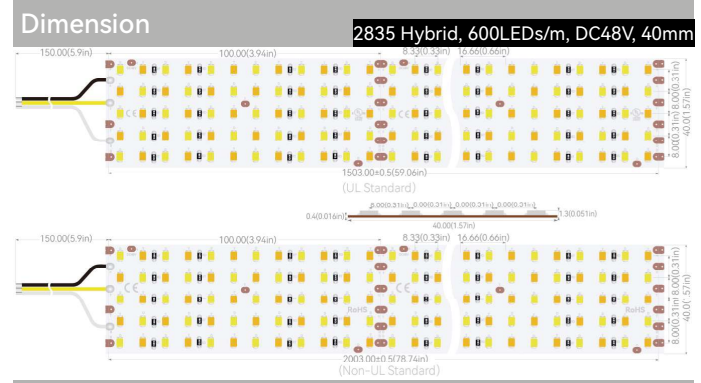


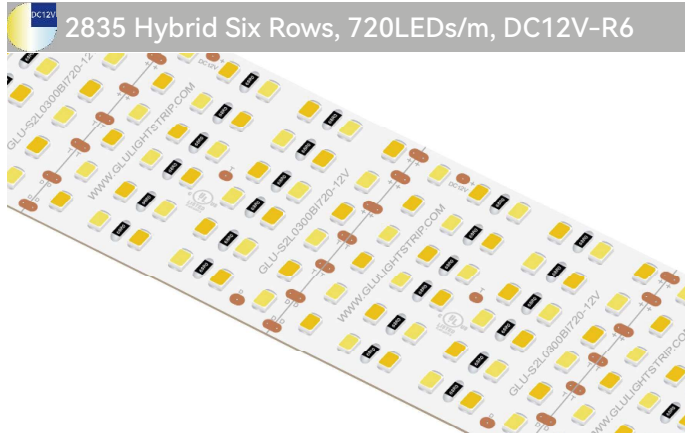



Product Code: GLUA12CV048L0300BI03W720C3
 Part No.: GLU-S2L0300BI720-12V
 LED Qty.: 720pcs
 Working Voltage: DC12V
 Power: 200W/m
 Current: 16.8A
 Beam Angle: 120°
 Dimension(UL Standard): 250×48×1.3mm(9.84×1.89×0.051in.)
 Dimension(Non-UL Standard): 1000×48×1.3mm(39.37×1.89×0.051in.)
 Mini Cuttable Size: 50×48mm(1.97×1.89in.)
 Operating Temperature: -20° C to +50° C
 IP Grade: IP20
 Standard Connector: 3Pin Bared cable
 Standard Installation: 3M 9080HL Back adhesive
 Life Span:50,000 Hrs
 Certification: UL/CUL Listed, CE Compliant

12VDC Bi-color, DC12V
 CCT Whites: 2000-10000K
 Typical CCT Whites: 2800K(Tungsten)/6500K(Daylight)
 CRI Whites: 95+(Tungsten)/95+(Daylight)
 TLCI Whites: 95+(Tungsten)/95+(Daylight)
 TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)
 Lumens (Typical): 4130(Tungsten)/4650(Daylight)

Dimension 2835 Hybrid, 720LEDs/m, DC12V, 48mm

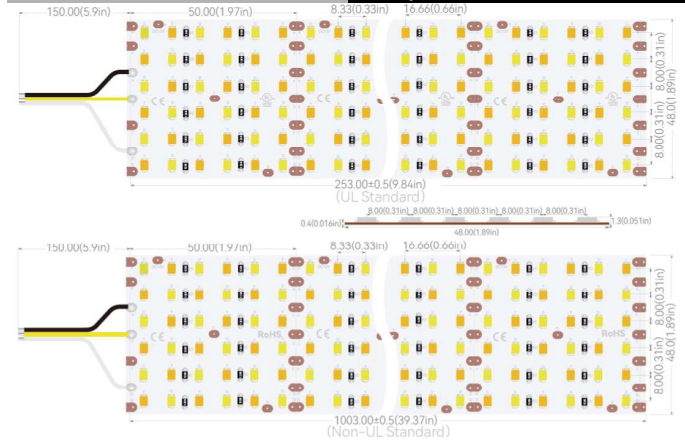


BARE WIRE

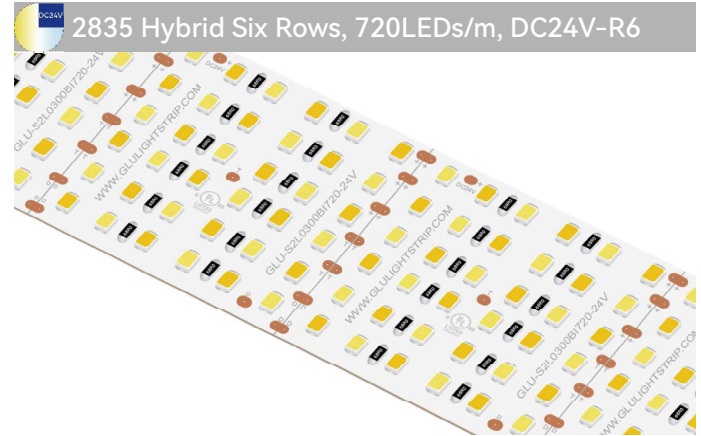


Product Code: GLUA24CV048L0300BI06W720C3
 Part No.: GLU-S2L0300BI720-24V
 LED Qty.: 720pcs
 Working Voltage: DC24V
 Power: 200W/m
 Current: 8.4A
 Beam Angle: 120°
 Dimension(UL Standard): 500×48×1.3mm(19.68×1.89×0.051in.)
 Dimension(Non-UL Standard): 1000×48×1.3mm(39.37×1.89×0.051in.)
 Mini Cuttable Size: 50×48mm(1.97×1.89in.)
 Operating Temperature: -20° C to +50° C
 IP Grade: IP20
 Standard Connector: 3Pin Bared cable
 Standard Installation: 3M 9080HL Back adhesive
 Life Span:50,000 Hrs
 Certification: UL/CUL Listed, CE Compliant

24VDC Bi-color, DC24V
 CCT Whites: 2000-10000K
 Typical CCT Whites: 2800K(Tungsten)/6500K(Daylight)
 CRI Whites: 95+(Tungsten)/95+(Daylight)
 TLCI Whites: 95+(Tungsten)/95+(Daylight)
 TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)
 Lumens (Typical): 4130(Tungsten)/4650(Daylight)

Dimension 2835 Hybrid, 720LEDs/m, DC24V, 48mm

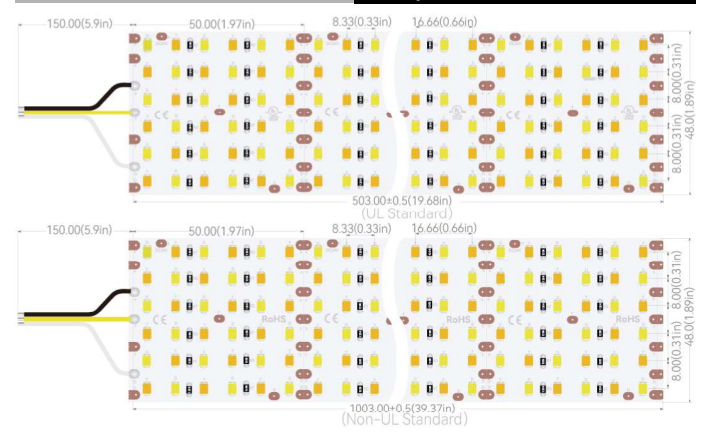

BARE WIRE





Product Code: GLUA48CV048L0300BI12W720C3
Part No.: GLU-S2L0300BI720-48V
LED Qty.: 720pcs
Working Voltage: DC48V
Power: 200W/m
Current: 4.2A
Beam Angle: 120°
Dimension(UL Standard): 500×48×1.3mm(19.68×1.89×0.051in.)
Dimension(Non-UL Standard): 1000×48×1.3mm(39.37×1.89×0.051in.)
Mini Cuttable Size: 100×48mm(3.94×1.89in.)
Operating Temperature: -20° C to +50° C
IP Grade: IP20
Standard Connector: 3Pin Bared cable
Standard Installation: 3M 9080HL Back adhesive
Life Span:50,000 Hrs
Certification: UL/CUL Listed, CE Compliant


48VDC: Bi-color, DC48V

CCT Whites: 2000-10000K
Typic CCT Whites: 2800K(Tungsten)/6500K(Daylight)
CRI Whites: 95+(Tungsten)/95+(Daylight)
TLCI Whites: 95+(Tungsten)/95+(Daylight)
TM-30 Data Whites: Rf>95, Rg>102, CQS>97(Tungsten/Daylight)
Lumens (Typical): 4130(Tungsten)/4650(Daylight)

Dimension 2835 Hybrid, 720LEDs/m, DC48V, 48mm




BARE WIRE

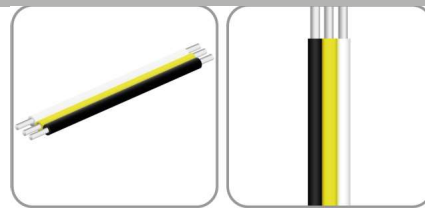




CINEMA Hybrid(Bi-Color/CCT) Flex LED Strip Series

5730 Hybrid Series

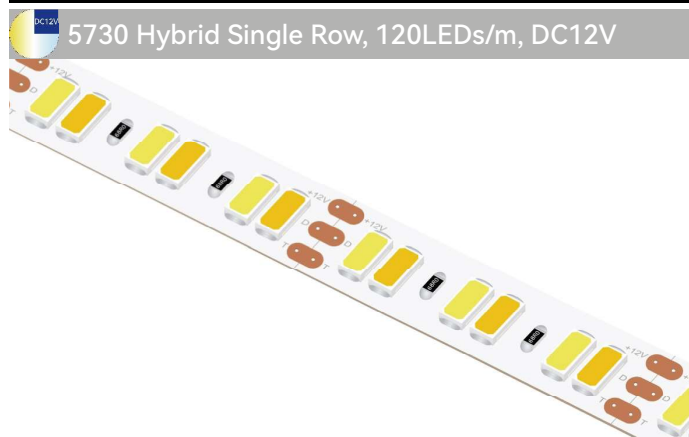


Product Code: GLUA12CV012L0700BI03W120C3
Part No.: GLU-S2L0700BI120-12V
LED Qty.: 120pcs
Working Voltage: DC12V
Power: 31.2W/m
Current: 2.6A
Beam Angle: 120°
Dimension(UL Standard): 2000×12×1.2mm(78.74×0.47×0.047in.)
Dimension(Non-UL Standard): 5000×12×1.2mm(196.85×0.47×0.047in.)
Mini Cuttable Size: 50×12mm(1.97×0.47in.)
Operating Temperature: -20° C to +50° C
IP Grade: IP20
Standard Connector: 3Pin Bared cable
Standard Installation: 3M 9080HL Back adhesive
Life Span:50,000 Hrs
Certification: UL/CUL Listed, CE Compliant

12VDC Bi-color, DC12V
CCT Whites: 2000-10000K
Typic CCT Whites: 2800K(Tungsten)/6500K(Daylight)
CRI Whites: 95+(Tungsten)/95+(Daylight)
TLCI Whites: 95+(Tungsten)/95+(Daylight)
TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)
Lumens (Typical): 1250(Tungsten)/1410(Daylight)

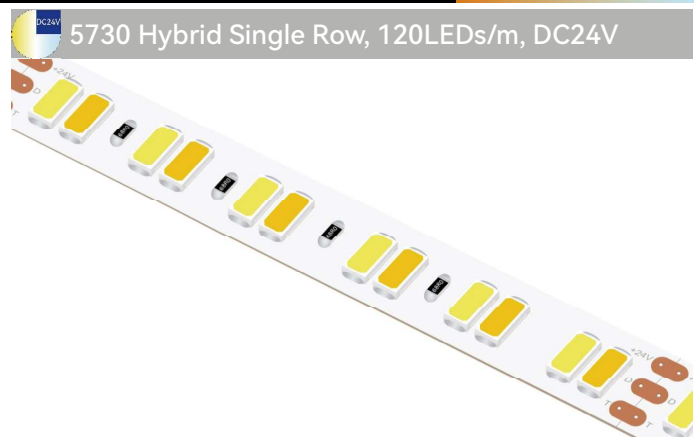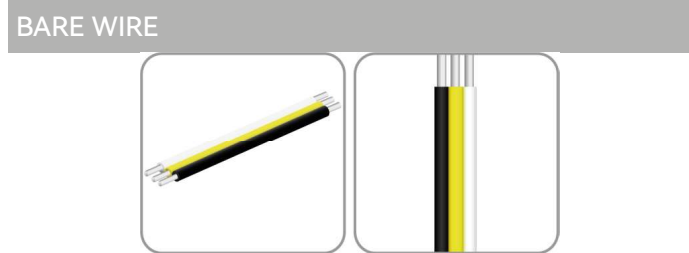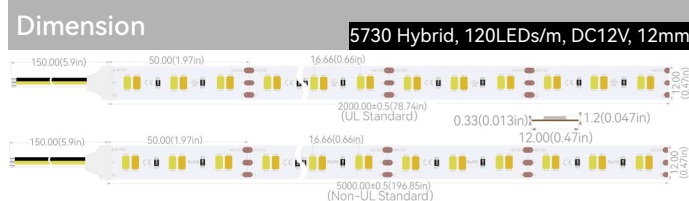

Product Code: GLUA24CV012L0700BI06W120C3
Part No.: GLU-S2L0700BI120-24V
LED Qty.: 120pcs
Working Voltage: DC24V
Power: 31.2W/m
Current: 1.3A
Beam Angle: 120°
Dimension(UL Standard): 3000×12×1.2mm(118.11×0.47×0.047in.)
Dimension(Non-UL Standard): 5000×12×1.2mm(196.85×0.47×0.047in.)
Mini Cuttable Size: 100×12mm(3.94×0.47in.)
Operating Temperature: -20° C to +50° C
IP Grade: IP20
Standard Connector: 3Pin Bared cable
Standard Installation: 3M 9080HL Back adhesive
Life Span:50,000 Hrs
Certification: UL/CUL Listed, CE Compliant



24VDC Bi-color, DC24V
CCT Whites: 2000-10000K
Typic CCT Whites: 2800K(Tungsten)/6500K(Daylight)
CRI Whites: 95+(Tungsten)/95+(Daylight)
TLCI Whites: 95+(Tungsten)/95+(Daylight)
TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)
Lumens (Typical): 1250(Tungsten)/1410(Daylight)

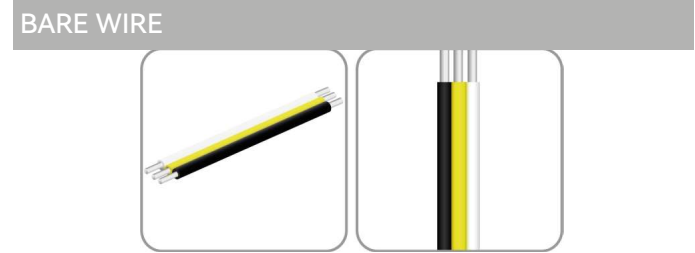





Product Code: GLUA12CV020L0700BI03W240C3
 Part No.: GLU-S2L0700BI240-12V
 LED Qty.: 240pcs
 Working Voltage: DC12V
 Power: 51.8W/m
 Current: 4.32A
 Beam Angle: 120°
 Dimension(UL Standard): 1000×20×1.2mm(39.37×0.79×0.047in.)
 Dimension(Non-UL Standard): 5000×20×1.2mm(196.85×0.79×0.047in.)
 Mini Cuttable Size: 50×20mm(1.97×0.79in.)
 Operating Temperature: -20° C to +50° C
 IP Grade: IP20
 Standard Connector: 3Pin Bared cable
 Standard Installation: 3M 9080HL Back adhesive
 Life Span:50,000 Hrs
 Certification: UL/CUL Listed, CE Compliant

12VDC Bi-color, DC12V
 CCT Whites: 2000-10000K
 Typic CCT Whites: 2800K(Tungsten)/6500K(Daylight)
 CRI Whites: 95+(Tungsten)/95+(Daylight)
 TLCI Whites: 95+(Tungsten)/95+(Daylight)
 TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)
 Lumens (Typical): 2030(Tungsten)/2410(Daylight)

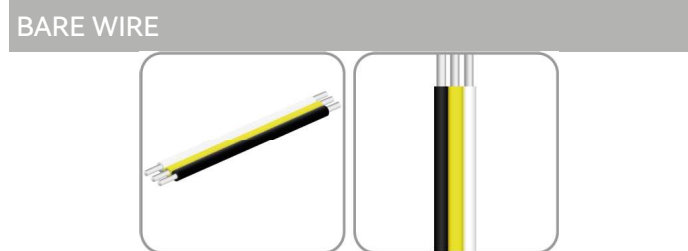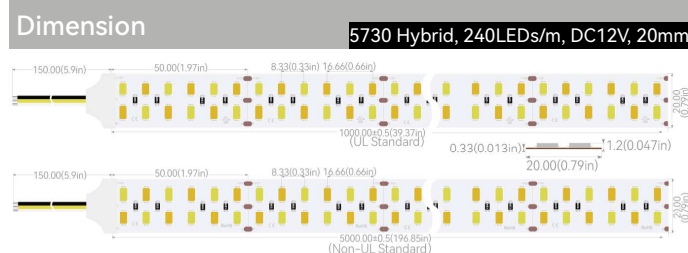

Product Code: GLUA24CV012L0700BI06W240C3
 Part No.: GLU-S2L0700BI240-24V
 LED Qty.: 240pcs
 Working Voltage: DC24V
 Power: 51.8W/m
 Current: 2.16A
 Beam Angle: 120°
 Dimension(UL Standard): 2000×20×1.2mm(78.74×0.79×0.047in.)
 Dimension(Non-UL Standard): 5000×20×1.2mm(196.85×0.79×0.047in.)
 Mini Cuttable Size: 50×20mm(1.97×0.79in.)
 Operating Temperature: -20° C to +50° C
 IP Grade: IP20
 Standard Connector: 3Pin Bared cable
 Standard Installation: 3M 9080HL Back adhesive
 Life Span:50,000 Hrs
 Certification: UL/CUL Listed, CE Compliant

24VDC Bi-color, DC24V
 CCT Whites: 2000-10000K
 Typic CCT Whites: 2800K(Tungsten)/6500K(Daylight)
 CRI Whites: 95+(Tungsten)/95+(Daylight)
 TLCI Whites: 95+(Tungsten)/95+(Daylight)
 TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)
 Lumens (Typical): 2030(Tungsten)/2410(Daylight)

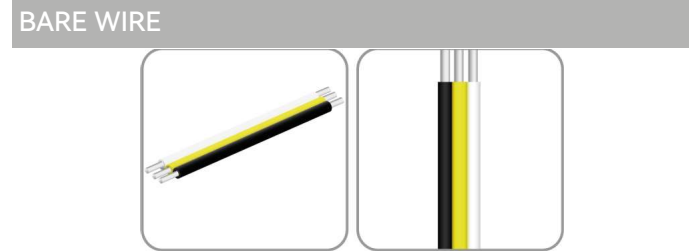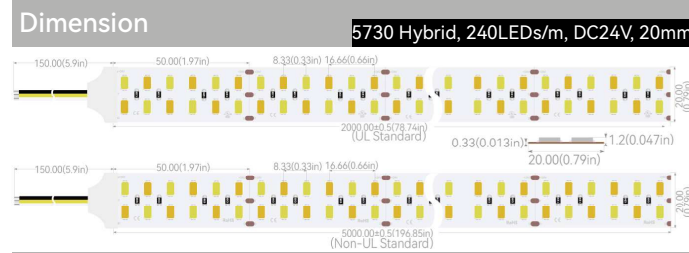




Product Code: GLUA12CV010L0500BI03W120C2
 Part No.: GLU-S2L0500BI120-12V
 LED Qty.: 120pcs
 Working Voltage: DC12V
 Power: 12.96W/m
 Current: 1.08A
 Beam Angle: 120°
 Dimension(UL Standard): 5000×10×0.92mm(196.85×0.39×0.036in.)
 Dimension(Non-UL Standard):5000×10×0.92mm(196.85×0.39×0.036in.)
 Mini Cuttable Size: 50×10mm(1.97×0.39in.)
 Operating Temperature: -20° C to +50° C
 IP Grade: IP20
 Standard Connector: 3Pin Bared cable
 Standard Installation: 3M 9080HL Back adhesive
 Life Span:50,000 Hrs
 Certification: UL/CUL Listed, CE Compliant




CCT Whites: 2000-10000K
 Typic CCT Whites: 2800K(Tungsten)/6500K(Daylight)
 CRI Whites: 95+(Tungsten)/95+(Daylight)
 TLCI Whites: 95+(Tungsten)/95+(Daylight)
 TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)
 Lumens (Typical): 375(Tungsten)/535(Daylight)

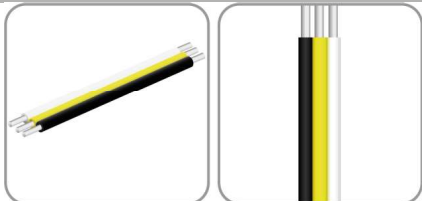

Product Code: GLUA24CV010L0500BI06W120C3
 Part No.: GLU-S2L0500BI120-24V
 LED Qty.: 120pcs
 Working Voltage: DC24V
 Power: 12.96W/m
 Current: 0.54A
 Beam Angle: 120°
 Dimension(UL Standard): 5000×10×0.92mm(196.85×0.39×0.036in.)
 Dimension(Non-UL Standard):5000×10×0.92mm(196.85×0.39×0.036in.)
 Mini Cuttable Size: 100×10mm(3.94×0.39in.)
 Operating Temperature: -20° C to +50° C
 IP Grade: IP20
 Standard Connector: 3Pin Bared cable
 Standard Installation: 3M 9080HL Back adhesive
 Life Span:50,000 Hrs
 Certification: UL/CUL Listed, CE Compliant




CCT Whites: 2000-10000K
 Typic CCT Whites: 2800K(Tungsten)/6500K(Daylight)
 CRI Whites: 95+(Tungsten)/95+(Daylight)
 TLCI Whites: 95+(Tungsten)/95+(Daylight)
 TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)
 Lumens (Typical): 375(Tungsten)/535(Daylight)

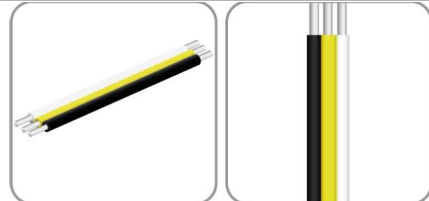




CINEMA Hybrid(Bi-Color/CCT) Flex LED Strip Series

3014 Hybrid Series

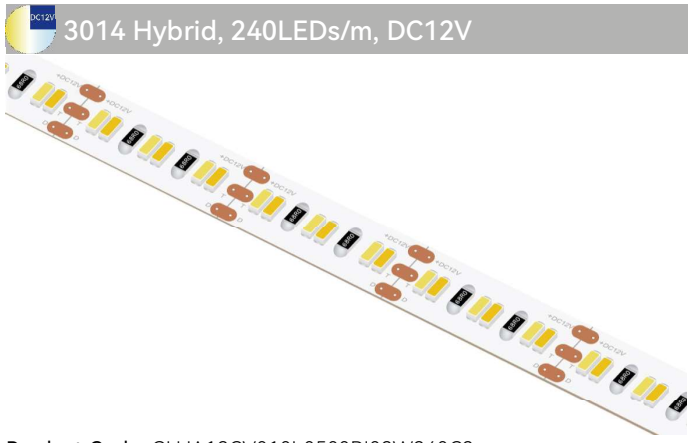



Product Code: GLUA12CV010L0500BI03W240C3
 Part No.: GLU-S2L0500BI240-12V
 LED Qty.: 240pcs
 Working Voltage: DC12V
 Power: 24W/m
 Current: 2A
 Beam Angle: 120°
 Dimension(UL Standard): 2500×10×1.1mm(98.43×0.39×0.043in.)
 Dimension(Non-UL Standard):5000×10×1.1mm(196.85×0.39×0.043in.)
 Mini Cuttable Size: 25×10mm(0.98×0.39in.)
 Operating Temperature: -20° C to +50° C
 IP Grade: IP20
 Standard Connector: 3Pin Bared cable
 Standard Installation: 3M 9080HL Back adhesive
 Life Span:50,000 Hrs
 Certification: UL/CUL Listed, CE Compliant


12VDC Bi-color, DC12V
 CCT Whites: 2000-10000K
 Typic CCT Whites: 2800K(Tungsten)/6500K(Daylight)
 CRI Whites: 95+(Tungsten)/95+(Daylight)
 TLCI Whites: 95+(Tungsten)/95+(Daylight)
 TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)
 Lumens (Typical): 690(Tungsten)/995(Daylight)

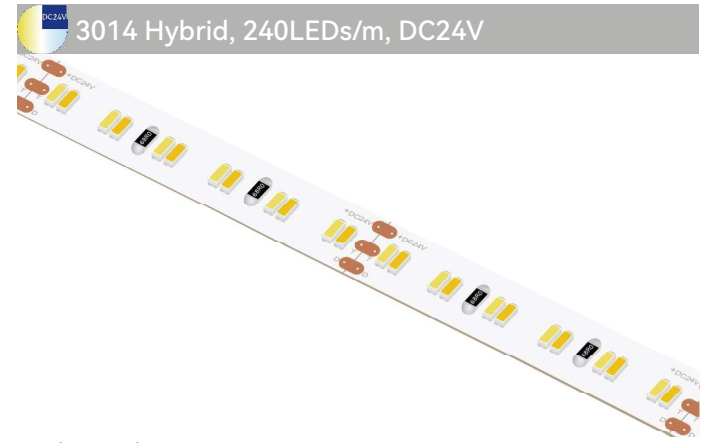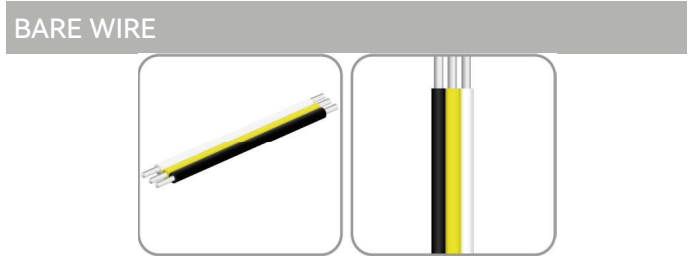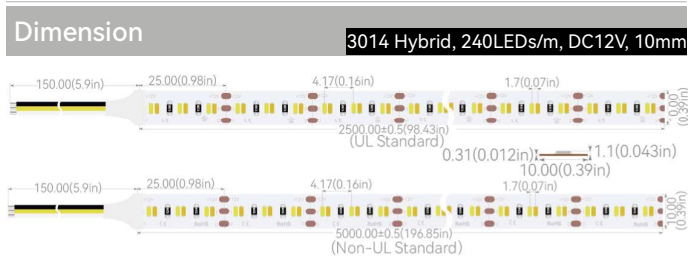

Product Code: GLUA24CV010L0500BI06W240C3
 Part No.: GLU-S2L0500BI240-24V
 LED Qty.: 240pcs
 Working Voltage: DC24V
 Power: 24W/m
 Current: 1A
 Beam Angle: 120°
 Dimension(UL Standard): 4000×10×1.1mm(157.48×0.39×0.043in.)
 Dimension(Non-UL Standard):5000×10×1.1mm(196.85×0.39×0.043in.)
 Mini Cuttable Size: 50×10mm(1.97×0.39in.)
 Operating Temperature: -20° C to +50° C
 IP Grade: IP20
 Standard Connector: 3Pin Bared cable
 Standard Installation: 3M 9080HL Back adhesive
 Life Span:50,000 Hrs
 Certification: UL/CUL Listed, CE Compliant

24VDC Bi-color, DC24V
 CCT Whites: 2000-10000K
 Typic CCT Whites: 2800K(Tungsten)/6500K(Daylight)
 CRI Whites: 95+(Tungsten)/95+(Daylight)
 TLCI Whites: 95+(Tungsten)/95+(Daylight)
 TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)
 Lumens (Typical): 690(Tungsten)/995(Daylight)

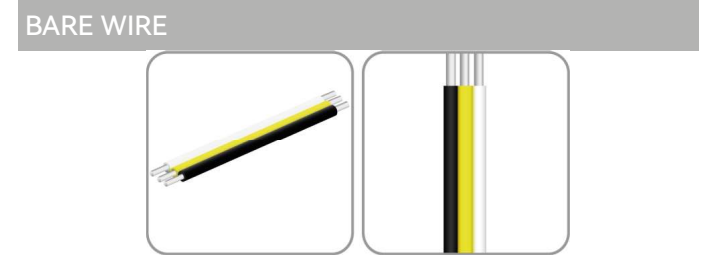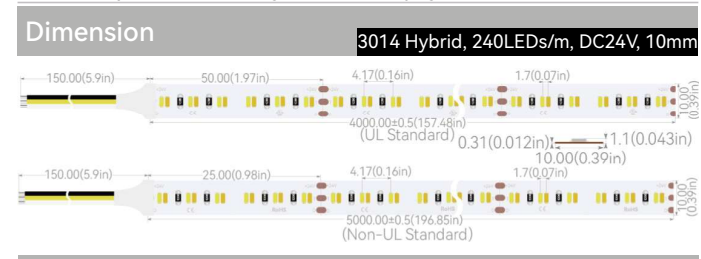

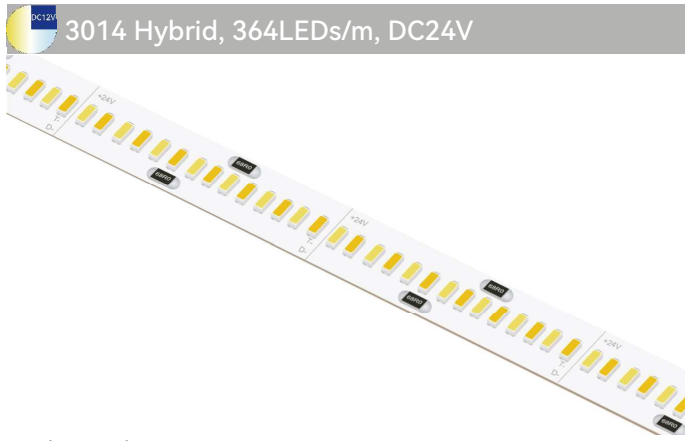


Product Code: GLUA24CV010L0500BI07W364C3
Part No.: GLU-S2L0500BI364-24V
LED Qty.: 364pcs
Working Voltage: DC24V
Power: 27.5W/m
Current: 1.14A
Beam Angle: 120°
Dimension(UL Standard): 3500×10×1.12mm(137.8×0.39×0.044in.)
Dimension(Non-UL Standard):5000×10×1.12mm(196.85×0.39×0.044in.)
Mini Cuttable Size: 38.46×10mm(1.51×0.39in.)
Operating Temperature: -20° C to +50° C
IP Grade: IP20
Standard Connector: 3Pin Bared cable
Standard Installation: 3M 9080HL Back adhesive
Life Span:50,000 Hrs
Certification: UL/CUL Listed, CE Compliant


12VDC Bi-color, DC12V

CCT Whites: 2000-10000K
Typic CCT Whites: 2800K(Tungsten)/6500K(Daylight)
CRI Whites: 95+(Tungsten)/95+(Daylight)
TLCI Whites: 95+(Tungsten)/95+(Daylight)
TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)
Lumens (Typical): 1050(Tungsten)/1510(Daylight)

Dimension 3014 Hybrid, 364LEDs/m, DC24V, 10mm

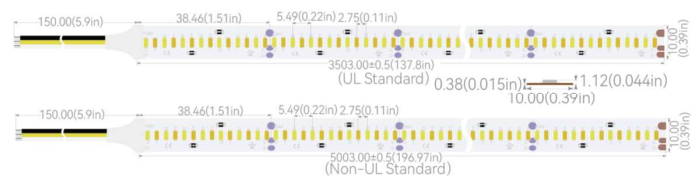


BARE WIRE

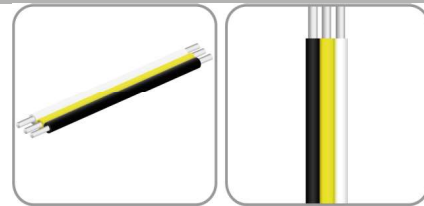




CINEMA Hybrid(Bi-Color/CCT) Flex LED Strip Series

3020 Hybrid Series

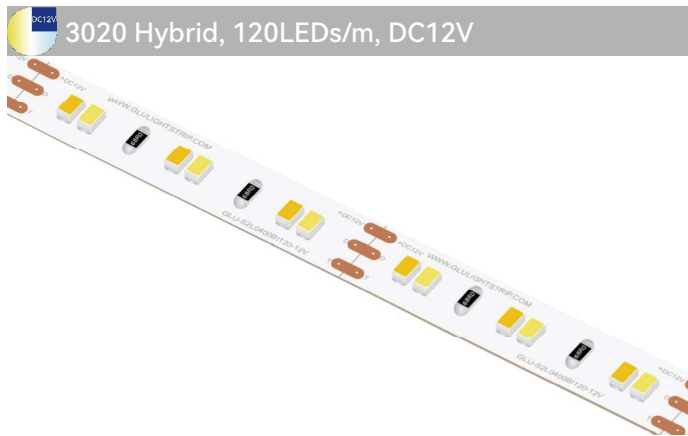



Product Code: GLUA12CV010L0400BI03W120C3
 Part No.: GLU-S2L0400BI120-12V
 LED Qty.: 240pcs
 Working Voltage: DC12V
 Power: 19.2W/m
 Current: 1.6A
 Beam Angle: 120°
 Dimension(UL Standard): 3000×10×1.6mm(118.11×0.39×0.063in.)
 Dimension(Non-UL Standard):5000×10×1.6mm(196.85×0.39×0.063in.)
 Mini Cuttable Size: 50×10mm(1.97×0.39in.)
 Operating Temperature: -20° C to +50° C
 IP Grade: IP20
 Standard Connector: 3Pin Bared cable
 Standard Installation: 3M 9080HL Back adhesive
 Life Span:50,000 Hrs
 Certification: UL/CUL Listed, CE Compliant


12VDC Bi-color, DC12V
 CCT Whites: 2000-10000K
 Typic CCT Whites: 2800K(Tungsten)/6500K(Daylight)
 CRI Whites: 95+(Tungsten)/95+(Daylight)
 TLCI Whites: 95+(Tungsten)/95+(Daylight)
 TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)
 Lumens (Typical): 730(Tungsten)/820(Daylight)

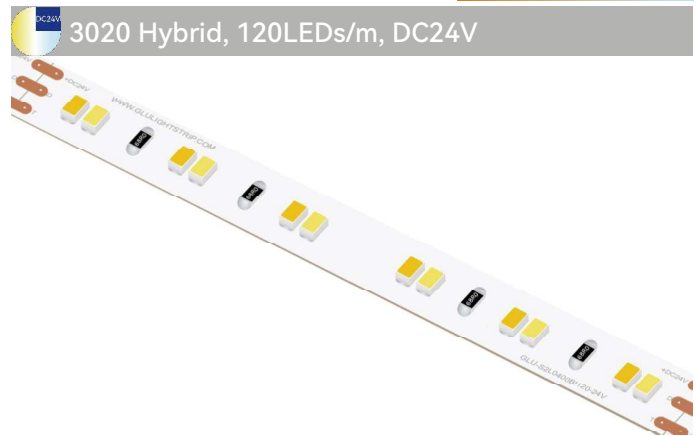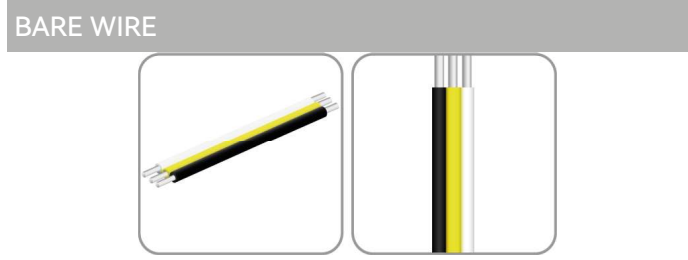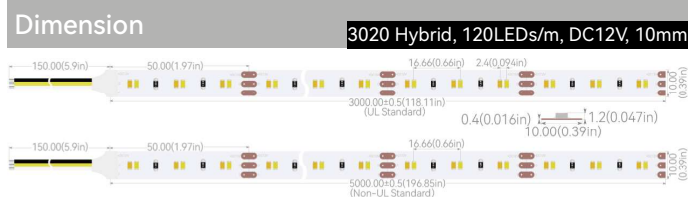

Product Code: GLUA24CV010L0400BI06W120C3
 Part No.: GLU-S2L0500BI120-24V
 LED Qty.:120pcs
 Working Voltage: DC24V
 Power: 19.2W/m
 Current: 0.8A
 Beam Angle: 120°
 Dimension(UL Standard): 5000×10×1.6mm(196.85×0.39×0.063in.)
 Dimension(Non-UL Standard):5000×10×1.6mm(196.85×0.39×0.063in.)
 Mini Cuttable Size: 100×10mm(3.94×0.39in.)
 Operating Temperature: -20° C to +50° C
 IP Grade: IP20
 Standard Connector: 3Pin Bared cable
 Standard Installation: 3M 9080HL Back adhesive
 Life Span:50,000 Hrs
 Certification: UL/CUL Listed, CE Compliant




24VDC Bi-color, DC24V
 CCT Whites: 2000-10000K
 Typic CCT Whites: 2800K(Tungsten)/6500K(Daylight)
 CRI Whites: 95+(Tungsten)/95+(Daylight)
 TLCI Whites: 95+(Tungsten)/95+(Daylight)
 TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)
 Lumens (Typical): 730(Tungsten)/820(Daylight)

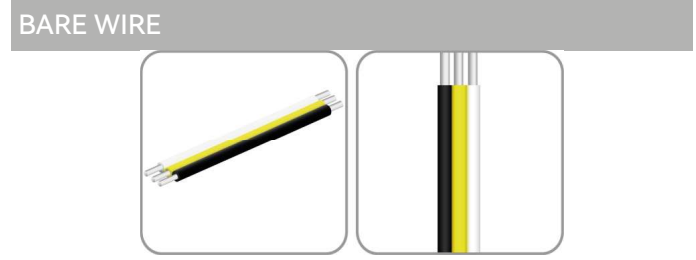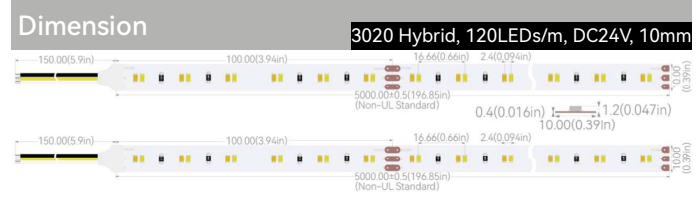

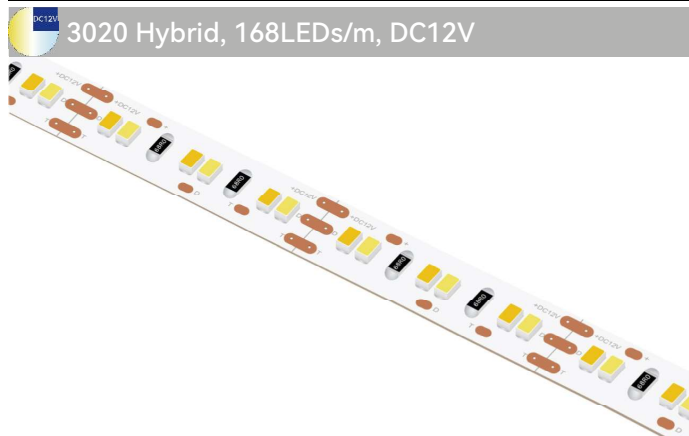



Product Code: GLUA12CV010L0400BI03W168C3
 Part No.: GLU-S2L0400BI168-12V
 LED Qty.: 168pcs
 Working Voltage: DC12V
 Power: 25.5W/m
 Current: 2.13A
 Beam Angle: 120°
 Dimension(UL Standard): 2000×10×1.6mm(78.74×0.39×0.063in.)
 Dimension(Non-UL Standard):5000×10×1.6mm(196.85×0.39×0.063in.)
 Mini Cuttable Size: 35.71×10mm(1.41×0.39in.)
 Operating Temperature: -20° C to +50° C
 IP Grade: IP20
 Standard Connector: 3Pin Bared cable
 Standard Installation: 3M 9080HL Back adhesive
 Life Span:50,000 Hrs
 Certification: UL/CUL Listed, CE Compliant

12VDC Bi-color, DC12V
 CCT Whites: 2000-10000K
 Typic CCT Whites: 2800K(Tungsten)/6500K(Daylight)
 CRI Whites: 95+(Tungsten)/95+(Daylight)
 TLCI Whites: 95+(Tungsten)/95+(Daylight)
 TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)
 Lumens (Typical): 970(Tungsten)/1100(Daylight)

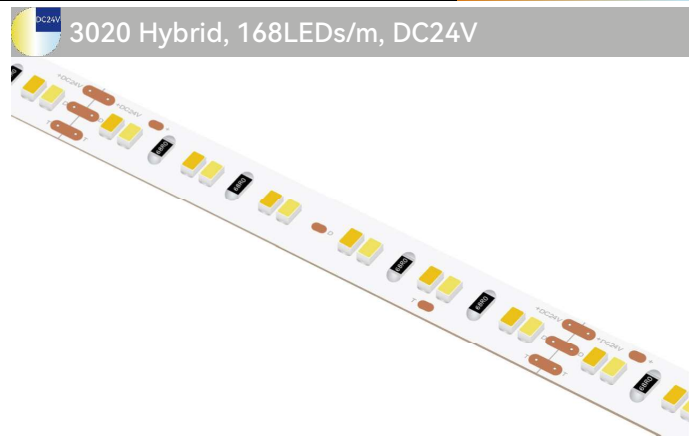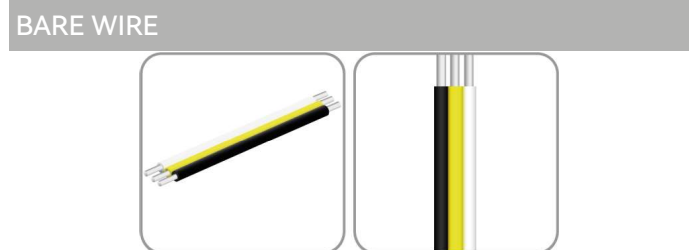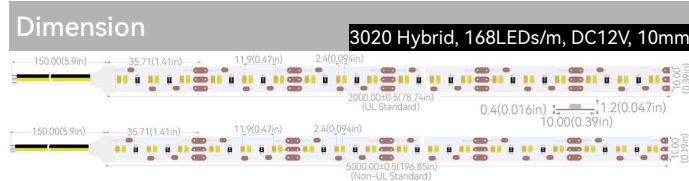


Product Code: GLUA24CV010L0400BI06W168C3
 Part No.: GLU-S2L0500BI168-24V
 LED Qty.:168pcs
 Working Voltage: DC24V
 Power: 25.5W/m
 Current: 1.06A
 Beam Angle: 120°
 Dimension(UL Standard): 4000×10×1.6mm(157.48×0.39×0.063in.)
 Dimension(Non-UL Standard):5000×10×1.6mm(196.85×0.39×0.063in.)
 Mini Cuttable Size: 71.42×10mm(2.81×0.39in.)
 Operating Temperature: -20° C to +50° C
 IP Grade: IP20
 Standard Connector: 3Pin Bared cable
 Standard Installation: 3M 9080HL Back adhesive
 Life Span:50,000 Hrs
 Certification: UL/CUL Listed, CE Compliant

24VDC Bi-color, DC24V
 CCT Whites: 2000-10000K
 Typic CCT Whites: 2800K(Tungsten)/6500K(Daylight)
 CRI Whites: 95+(Tungsten)/95+(Daylight)
 TLCI Whites: 95+(Tungsten)/95+(Daylight)
 TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)
 Lumens (Typical): 970(Tungsten)/1100(Daylight)

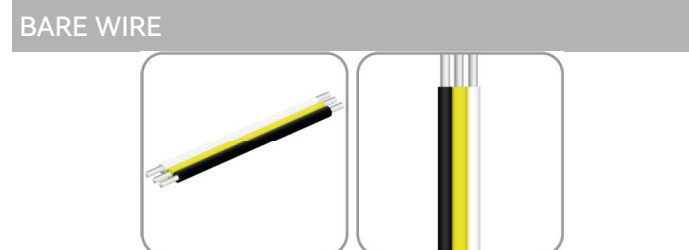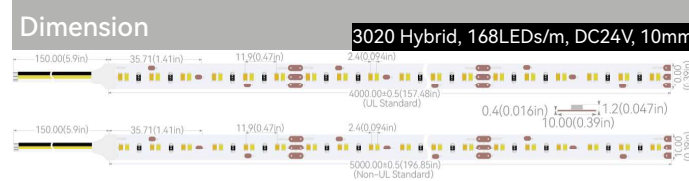




CINEMA Hybrid(Bi-Color/CCT) Flex LED Strip Series

3020 Hybrid Series

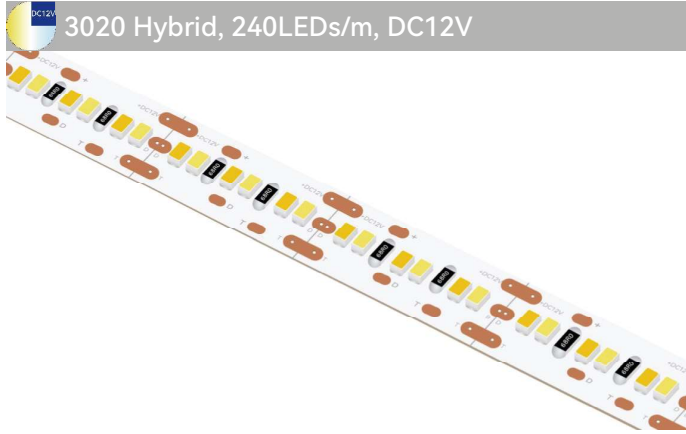



Product Code: GLUA12CV012L0400BI03W240C3
Part No.: GLU-S2L0400BI240-12V
LED Qty.: 240pcs
Working Voltage: DC12V
Power: 30.7W/m
Current: 2.56A
Beam Angle: 120°
Dimension(UL Standard): 2000×12×1.6mm(78.74×0.47×0.063in.)
Dimension(Non-UL Standard):5000×12×1.6mm(196.85×0.47×0.063in.)
Mini Cuttable Size: 25×12mm(0.98×0.47in.)
Operating Temperature: -20° C to +50° C
IP Grade: IP20
Standard Connector: 3Pin Bared cable
Standard Installation: 3M 9080HL Back adhesive
Life Span:50,000 Hrs
Certification: UL/CUL Listed, CE Compliant


12VDC Bi-color, DC12V
CCT Whites: 2000-10000K
Typic CCT Whites: 2800K(Tungsten)/6500K(Daylight)
CRI Whites: 95+(Tungsten)/95+(Daylight)
TLCI Whites: 95+(Tungsten)/95+(Daylight)
TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)
Lumens (Typical): 1190(Tungsten)/1350(Daylight)

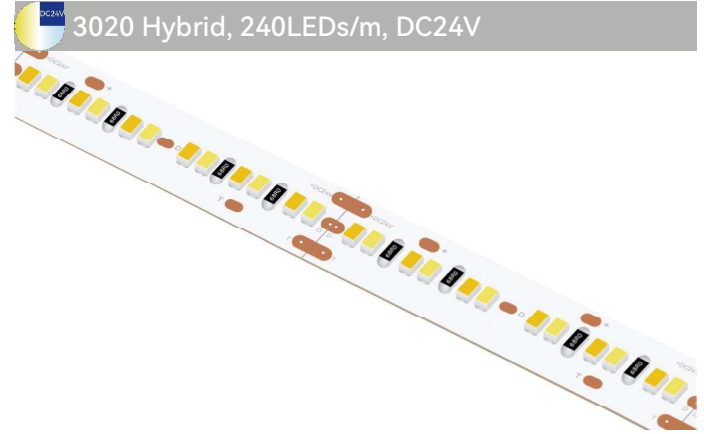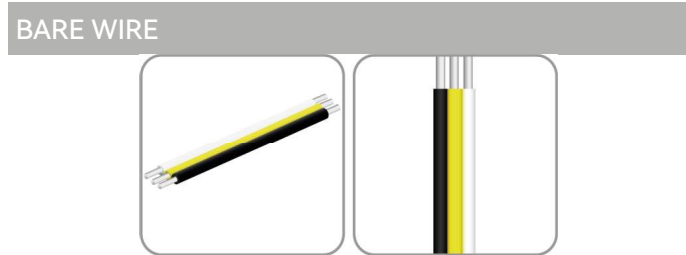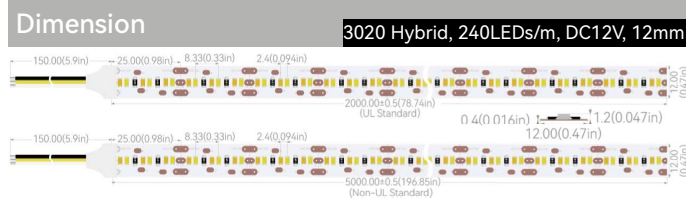

Product Code: GLUA24CV012L0400BI06W240C3
Part No.: GLU-S2L0500BI240-24V
LED Qty.:240pcs
Working Voltage: DC24V
Power: 30.7W/m
Current: 1.28A
Beam Angle: 120°
Dimension(UL Standard): 3000×12×1.6mm(118.11×0.47×0.063in.)
Dimension(Non-UL Standard):5000×12×1.6mm(196.85×0.47×0.063in.)
Mini Cuttable Size: 50×12mm(1.97×0.47in.)
Operating Temperature: -20° C to +50° C
IP Grade: IP20
Standard Connector: 3Pin Bared cable
Standard Installation: 3M 9080HL Back adhesive
Life Span:50,000 Hrs
Certification: UL/CUL Listed, CE Compliant



24VDC Bi-color, DC24V
CCT Whites: 2000-10000K
Typic CCT Whites: 2800K(Tungsten)/6500K(Daylight)
CRI Whites: 95+(Tungsten)/95+(Daylight)
TLCI Whites: 95+(Tungsten)/95+(Daylight)
TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)
Lumens (Typical): 1190(Tungsten)/1350(Daylight)

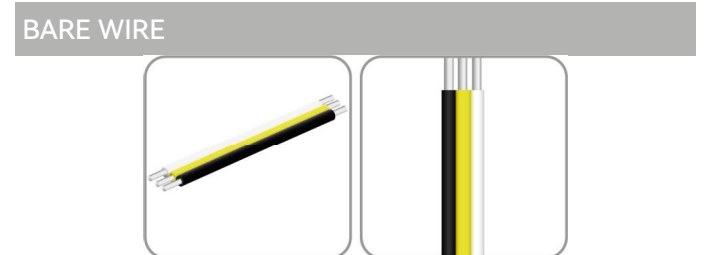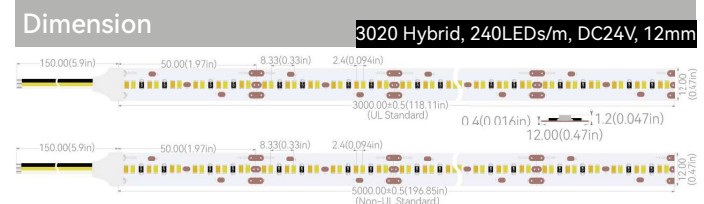

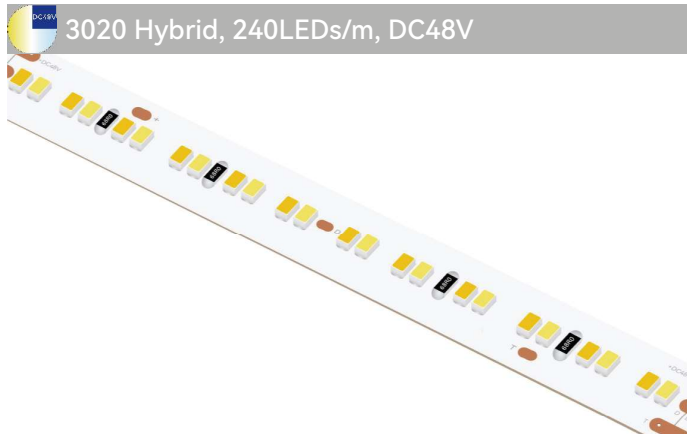



Product Code: GLUA48CV012L0400BI12W240C3
 Part No.: GLU-S2L0400BI240-48V
 LED Qty.: 240pcs
 Working Voltage: DC48V
 Power: 30.7W/m
 Current: 0.64A
 Beam Angle: 120°
 Dimension(UL Standard): 3000×12×1.6mm(118.11×0.47×0.063in.)
 Dimension(Non-UL Standard):5000×12×1.6mm(196.85×0.47×0.063in.)
 Mini Cuttable Size: 100×12mm(3.94×0.47in.)
 Operating Temperature: -20° C to +50° C
 IP Grade: IP20
 Standard Connector: 3Pin Bared cable
 Standard Installation: 3M 9080HL Back adhesive
 Life Span:50,000 Hrs
 Certification: UL/CUL Listed, CE Compliant

48VDC Bi-color, DC48V
 CCT Whites: 2000-10000K
 Typic CCT Whites: 2800K(Tungsten)/6500K(Daylight)
 CRI Whites: 95+(Tungsten)/95+(Daylight)
 TLCI Whites: 95+(Tungsten)/95+(Daylight)
 TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)
 Lumens (Typical): 1190(Tungsten)/1350(Daylight)

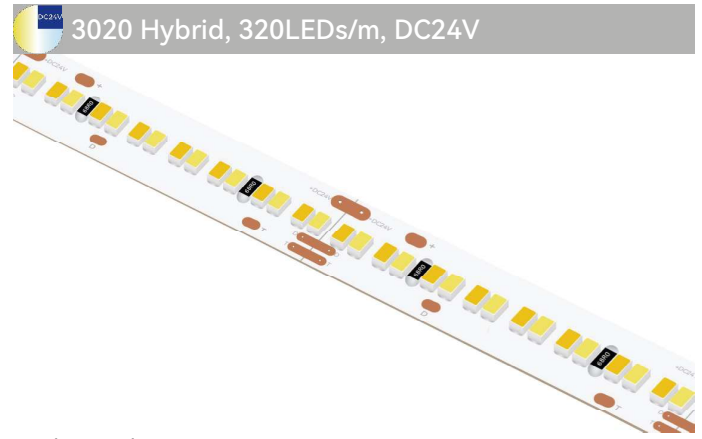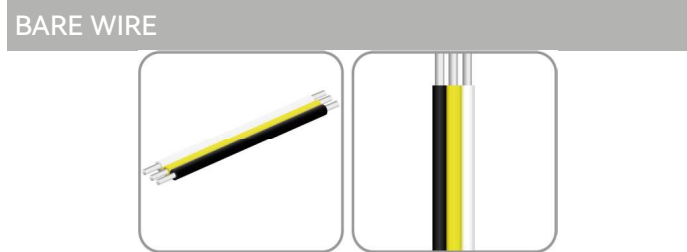


Product Code: GLUA24CV012L0400BI08W320C3
 Part No.: GLU-S2L0500BI320-24V
 LED Qty.:320pcs
 Working Voltage: DC24V
 Power: 33.6W/m
 Current: 1.4A
 Beam Angle: 120°
 Dimension(UL Standard): 3000×12×1.6mm(118.11×0.47×0.063in.)
 Dimension(Non-UL Standard):5000×12×1.6mm(196.85×0.47×0.063in.)
 Mini Cuttable Size: 50×10mm(1.97×0.39in.)
 Operating Temperature: -20° C to +50° C
 IP Grade: IP20
 Standard Connector: 3Pin Bared cable
 Standard Installation: 3M 9080HL Back adhesive
 Life Span:50,000 Hrs
 Certification: UL/CUL Listed, CE Compliant

24VDC Bi-color, DC24V
 CCT Whites: 2000-10000K
 Typic CCT Whites: 2800K(Tungsten)/6500K(Daylight)
 CRI Whites: 95+(Tungsten)/95+(Daylight)
 TLCI Whites: 95+(Tungsten)/95+(Daylight)
 TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)
 Lumens (Typical): 1710(Tungsten)/1940(Daylight)

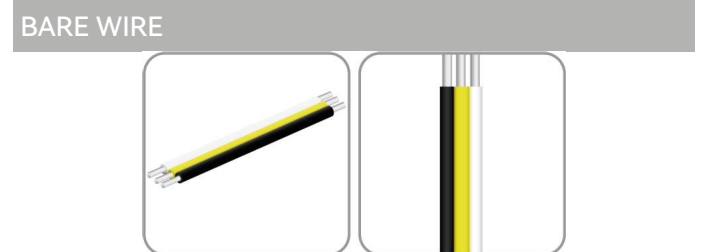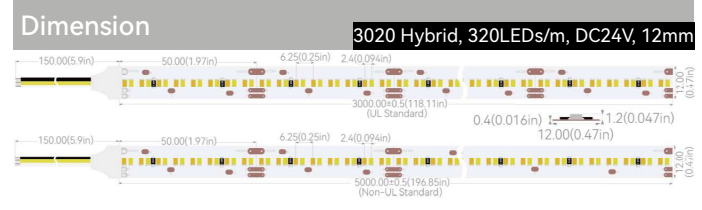




CINEMA Hybrid(Bi-Color/CCT) Flex LED Strip Series

3020 Hybrid Series

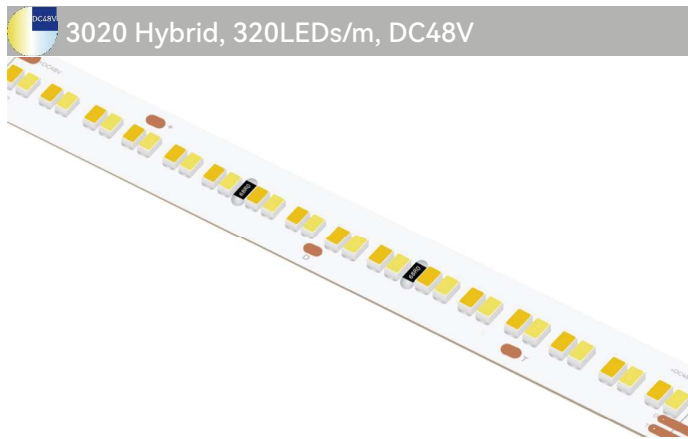



Product Code: GLUA48CV012L0400BI16W320C3
 Part No.: GLU-S2L0400BI320-48V
 LED Qty.: 320pcs
 Working Voltage: DC48V
 Power: 33.6W/m
 Current: 0.7A
 Beam Angle: 120°
 Dimension(UL Standard): 3000×12×1.6mm(118.11×0.47×0.063in.)
 Dimension(Non-UL Standard):5000×12×1.6mm(196.85×0.47×0.063in.)
 Mini Cuttable Size: 100×12mm(3.94×0.47in.)
 Operating Temperature: -20° C to +50° C
 IP Grade: IP20
 Standard Connector: 3Pin Bared cable
 Standard Installation: 3M 9080HL Back adhesive
 Life Span:50,000 Hrs
 Certification: UL/CUL Listed, CE Compliant


48VDC Bi-color, DC48V
 CCT Whites: 2000-10000K
 Typic CCT Whites: 2800K(Tungsten)/6500K(Daylight)
 CRI Whites: 95+(Tungsten)/95+(Daylight)
 TLCI Whites: 95+(Tungsten)/95+(Daylight)
 TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)
 Lumens (Typical): 1710(Tungsten)/1940(Daylight)

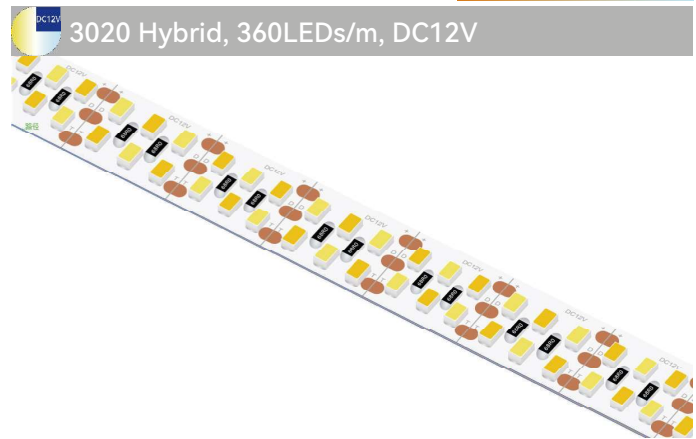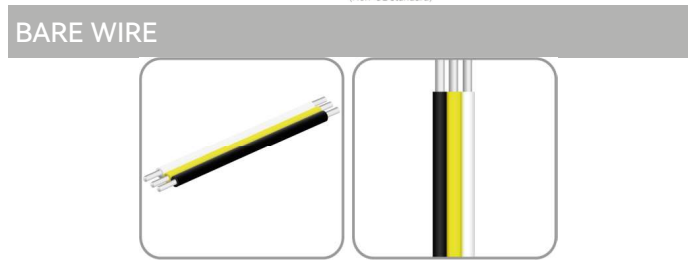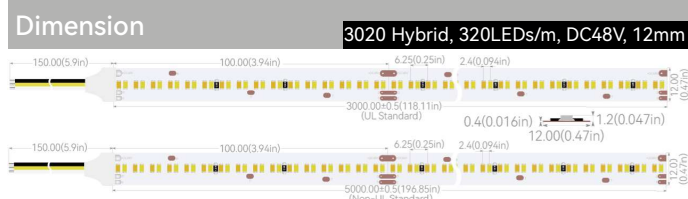

Product Code: GLUA12CV012L0400BI03W360C3
 Part No.: GLU-S2L0500BI360-12V
 LED Qty.:360pcs
 Working Voltage: DC12V
 Power: 36W/m
 Current: 3A
 Beam Angle: 120°
 Dimension(UL Standard): 1500×12×1.6mm(59.06×0.47×0.063in.)
 Dimension(Non-UL Standard):5000×12×1.6mm(196.85×0.47×0.063in.)
 Mini Cuttable Size: 16.66×12mm(0.66×0.39in.)
 Operating Temperature: -20° C to +50° C
 IP Grade: IP20
 Standard Connector: 3Pin Bared cable
 Standard Installation: 3M 9080HL Back adhesive
 Life Span:50,000 Hrs
 Certification: UL/CUL Listed, CE Compliant

12VDC Bi-color, DC12V
 CCT Whites: 2000-10000K
 Typic CCT Whites: 2800K(Tungsten)/6500K(Daylight)
 CRI Whites: 95+(Tungsten)/95+(Daylight)
 TLCI Whites: 95+(Tungsten)/95+(Daylight)
 TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)
 Lumens (Typical): 1420(Tungsten)/1600(Daylight)

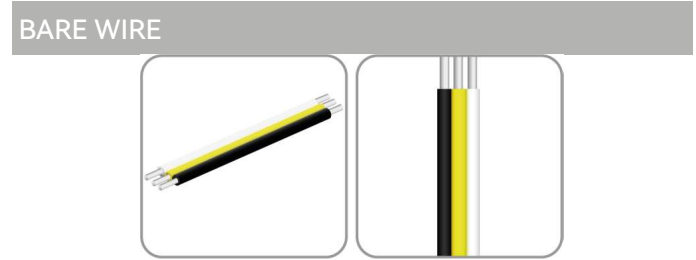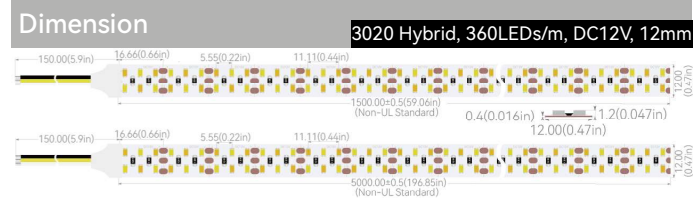


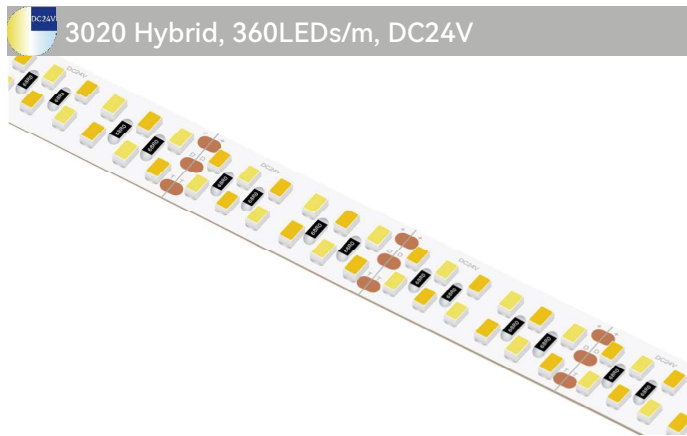



Product Code: GLUA24CV012L0400BI06W360C3
 Part No.: GLU-S2L0400BI360-24V
 LED Qty.: 360pcs
 Working Voltage: DC24V
 Power: 36W/m
 Current: 1.5A
 Beam Angle: 120°
 Dimension(UL Standard): 2500×12×1.6mm(98.43×0.47×0.063in.)
 Dimension(Non-UL Standard):5000×12×1.6mm(196.85×0.47×0.063in.)
 Mini Cuttable Size: 33.33×12mm(1.31×0.47in.)
 Operating Temperature: -20° C to +50° C
 IP Grade: IP20
 Standard Connector: 3Pin Bared cable
 Standard Installation: 3M 9080HL Back adhesive
 Life Span:50,000 Hrs
 Certification: UL/CUL Listed, CE Compliant

24VDC Bi-color, DC24V
 CCT Whites: 2000-10000K
 Typic CCT Whites: 2800K(Tungsten)/6500K(Daylight)
 CRI Whites: 95+(Tungsten)/95+(Daylight)
 TLCI Whites: 95+(Tungsten)/95+(Daylight)
 TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)
 Lumens (Typical): 1420(Tungsten)/1600(Daylight)

Dimension 3020 Hybrid, 360LEDs/m, DC24V, 12mm

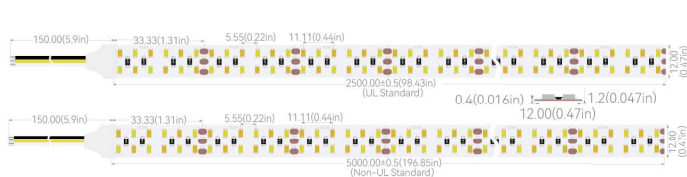


BARE WIRE

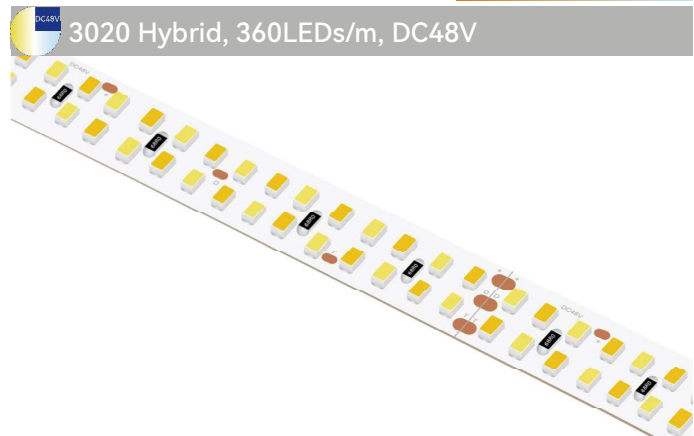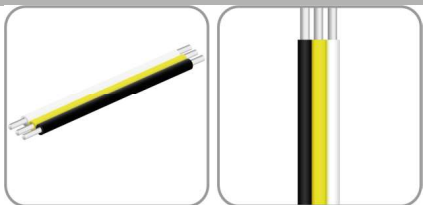


Product Code: GLUA48CV012L0400BI15W360C3
 Part No.: GLU-S2L0500BI360-48V
 LED Qty.:360pcs
 Working Voltage: DC48V
 Power: 35.7W/m
 Current: 0.74A
 Beam Angle: 120°
 Dimension(UL Standard): 2500×12×1.6mm(98.43×0.47×0.063in.)
 Dimension(Non-UL Standard):5000×12×1.6mm(196.85×0.47×0.063in.)
 Mini Cuttable Size: 83.33×12mm(3.28×0.39in.)
 Operating Temperature: -20° C to +50° C
 IP Grade: IP20
 Standard Connector: 3Pin Bared cable
 Standard Installation: 3M 9080HL Back adhesive
 Life Span:50,000 Hrs
 Certification: UL/CUL Listed, CE Compliant


48VDC Bi-color, DC48V
 CCT Whites: 2000-10000K
 Typic CCT Whites: 2800K(Tungsten)/6500K(Daylight)
 CRI Whites: 95+(Tungsten)/95+(Daylight)
 TLCI Whites: 95+(Tungsten)/95+(Daylight)
 TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)
 Lumens (Typical): 1730(Tungsten)/1960(Daylight)

Dimension 3020 Hybrid, 360LEDs/m, DC48V, 12mm

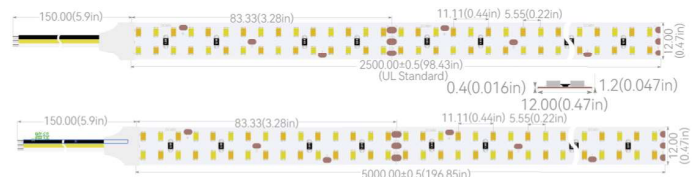

BARE WIRE

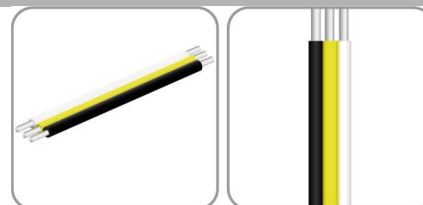

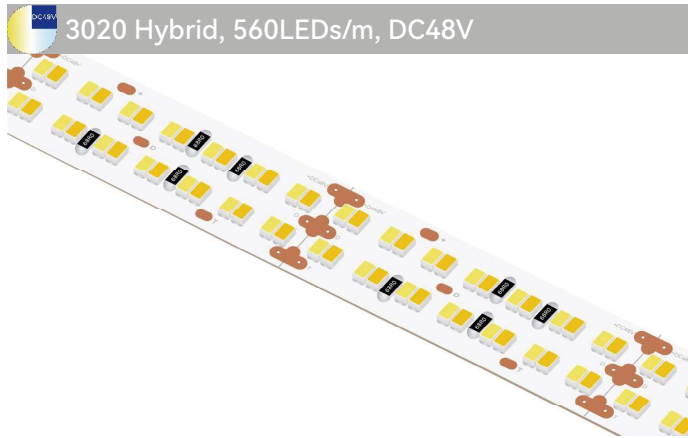


Product Code: GLUA48CV015L0400BI14W560C3
Part No.: GLU-S2L0400BI560-48V
LED Qty.:560pcs
Working Voltage: DC48V
Power: 48W/m
Current: 1A
Beam Angle: 120°
Dimension(UL Standard): 2000×15×1.6mm(78.74×0.59×0.063in.)
Dimension(Non-UL Standard):5000×15×1.6mm(196.85×0.59×0.063in.)
Mini Cuttable Size: 50×15mm(1.97×0.59in.)
Operating Temperature: -20° C to +50° C
IP Grade: IP20
Standard Connector: 3Pin Bared cable
Standard Installation: 3M 9080HL Back adhesive
Life Span:50,000 Hrs
Certification: UL/CUL Listed, CE Compliant


48VDC Bi-color, DC48V


CCT Whites: 2000-10000K
Typic CCT Whites: 2800K(Tungsten)/6500K(Daylight)
CRI Whites: 95+(Tungsten)/95+(Daylight)
TLCI Whites: 95+(Tungsten)/95+(Daylight)
TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)
Lumens (Typical): 2200(Tungsten)/2500(Daylight)

Dimension 3020 Hybrid, 360LEDs/m, DC48V, 12mm

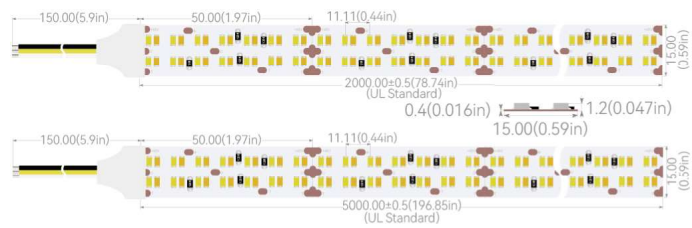




BARE WIRE

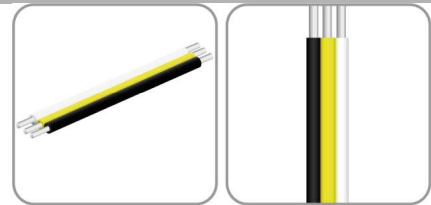

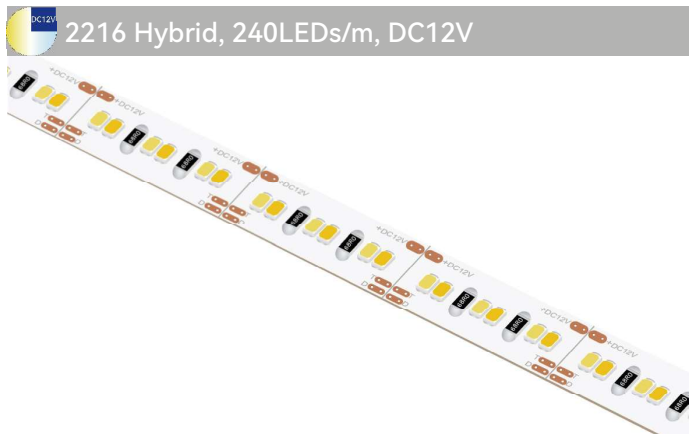



Product Code: GLUA12CV010L0600BI03W240C3
 Part No.: GLU-S2L0600BI240-12V
 LED Qty.: 240pcs
 Working Voltage: DC12V
 Power: 17.28W/m
 Current: 1.44A
 Beam Angle: 120°
 Dimension(UL Standard): 3500×10×0.98mm(137.8×0.39×0.039in.)
 Dimension(Non-UL Standard):5000×10×0.98mm(196.85×0.39×0.039in.)
 Mini Cuttable Size: 25×10mm(0.98×0.39in.)
 Operating Temperature: -20° C to +50° C
 IP Grade: IP20
 Standard Connector: 3Pin Bared cable
 Standard Installation: 3M 9080HL Back adhesive
 Life Span:50,000 Hrs
 Certification: UL/CUL Listed, CE Compliant

12VDC Bi-color, DC12V
 CCT Whites: 2000-10000K
 Typic CCT Whites: 2800K(Tungsten)/6500K(Daylight)
 CRI Whites: 95+(Tungsten)/95+(Daylight)
 TLCI Whites: 95+(Tungsten)/95+(Daylight)
 TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)
 Lumens (Typical): 690(Tungsten)/760(Daylight)

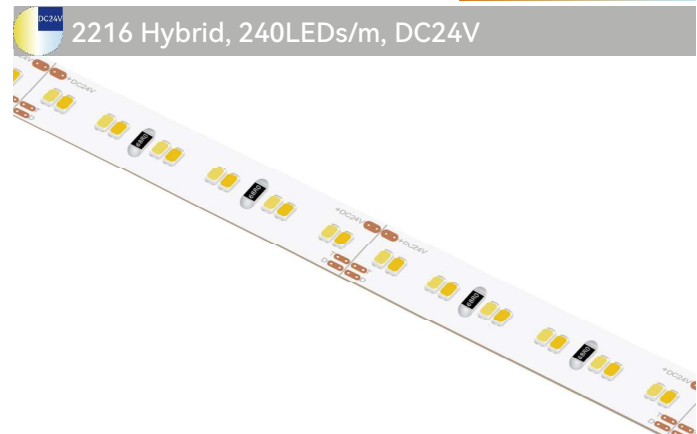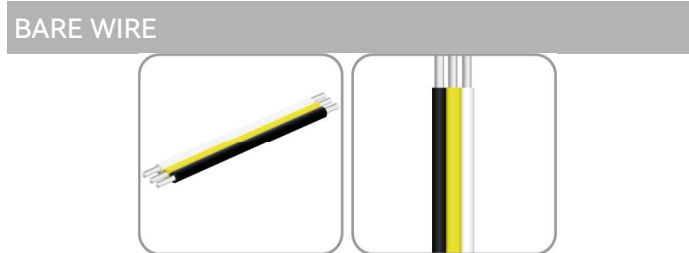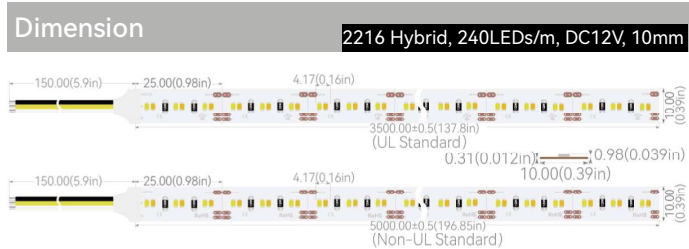


Product Code: GLUA24CV010L0600BI06W240C3
 Part No.: GLU-S2L0600BI240-24V
 LED Qty.:240pcs
 Working Voltage: DC24V
 Power: 17.28W/m
 Current: 0.72A
 Beam Angle: 120°
 Dimension(UL Standard): 5000×10×0.98mm(196.85×0.39×0.039in.)
 Dimension(Non-UL Standard):5000×10×0.98mm(196.85×0.39×0.039in.)
 Mini Cuttable Size: 50×10mm(1.97×0.39in.)
 Operating Temperature: -20° C to +50° C
 IP Grade: IP20
 Standard Connector: 3Pin Bared cable
 Standard Installation: 3M 9080HL Back adhesive
 Life Span:50,000 Hrs
 Certification: UL/CUL Listed, CE Compliant

24VDC Bi-color, DC24V
 CCT Whites: 2000-10000K
 Typic CCT Whites: 2800K(Tungsten)/6500K(Daylight)
 CRI Whites: 95+(Tungsten)/95+(Daylight)
 TLCI Whites: 95+(Tungsten)/95+(Daylight)
 TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)
 Lumens (Typical): 690(Tungsten)/760(Daylight)

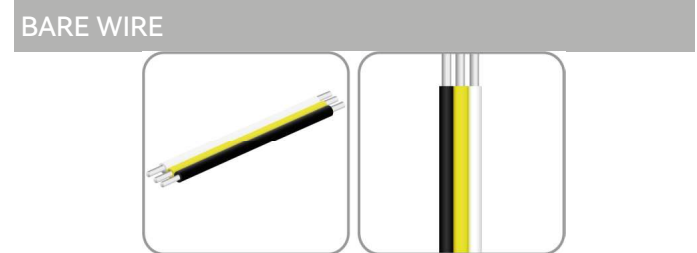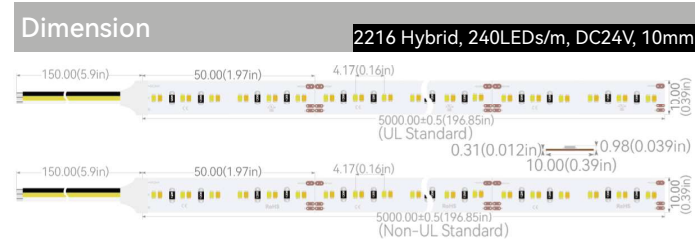

CINEMA Hybrid(Bi-Color/CCT) Flex LED Strip Series


2216 Hybrid Series

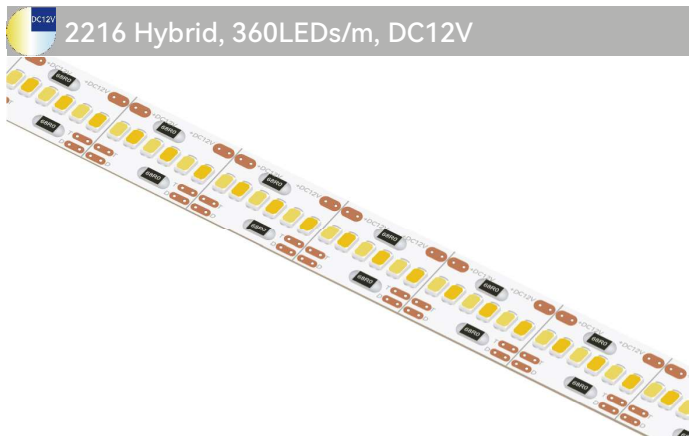



Product Code: GLUA12CV010L0600BI03W360C3
 Part No.: GLU-S2L0600BI360-12V
 LED Qty.: 360pcs
 Working Voltage: DC12V
 Power: 24.48W/m
 Current: 2.04A
 Beam Angle: 120°
 Dimension(UL Standard): 2500×10×0.98mm(98.43×0.39×0.039in.)
 Dimension(Non-UL Standard):5000×10×0.98mm(196.85×0.39×0.039in.)
 Mini Cuttable Size: 16.66×10mm(0.66×0.39in.)
 Operating Temperature: -20° C to +50° C
 IP Grade: IP20
 Standard Connector: 3Pin Bared cable
 Standard Installation: 3M 9080HL Back adhesive
 Life Span:50,000 Hrs
 Certification: UL/CUL Listed, CE Compliant

12VDC Bi-color, DC12V
 CCT Whites: 2000-10000K
 Typic CCT Whites: 2800K(Tungsten)/6500K(Daylight)
 CRI Whites: 95+(Tungsten)/95+(Daylight)
 TLCI Whites: 95+(Tungsten)/95+(Daylight)
 TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)
 Lumens (Typical): 980(Tungsten)/1080(Daylight)

Dimension 2216 Hybrid, 360LEDs/m, DC12V, 10mm

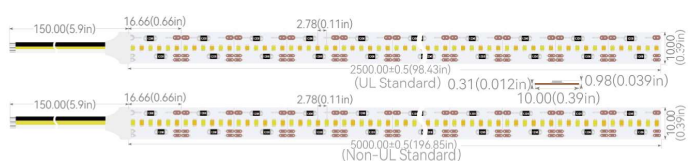


BARE WIRE

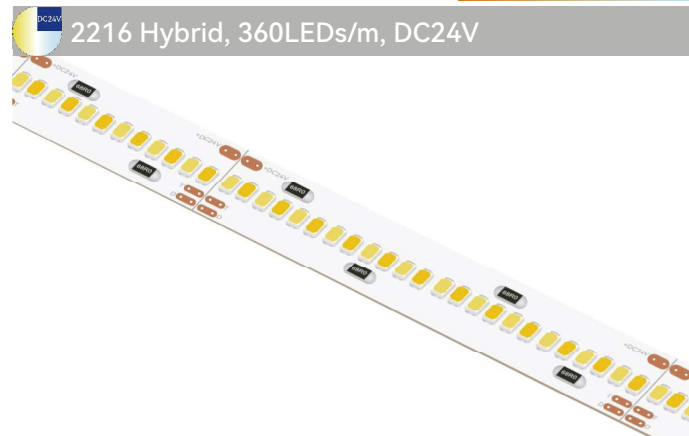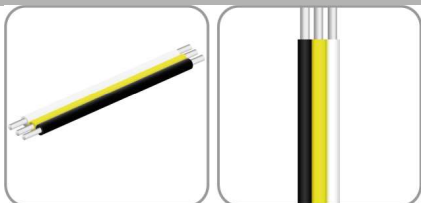

Product Code: GLUA24CV010L0600BI06W360C3
 Part No.: GLU-S2L0600BI360-24V
 LED Qty.:360pcs
 Working Voltage: DC24V
 Power: 24.48W/m
 Current: 1.02A
 Beam Angle: 120°
 Dimension(UL Standard): 4000×10×0.98mm(157.48×0.39×0.039in.)
 Dimension(Non-UL Standard):5000×10×0.98mm(196.85×0.39×0.039in.)
 Mini Cuttable Size: 33.33×10mm(1.31×0.39in.)
 Operating Temperature: -20° C to +50° C
 IP Grade: IP20
 Standard Connector: 3Pin Bared cable
 Standard Installation: 3M 9080HL Back adhesive
 Life Span:50,000 Hrs
 Certification: UL/CUL Listed, CE Compliant


24VDC Bi-color, DC24V
 CCT Whites: 2000-10000K
 Typic CCT Whites: 2800K(Tungsten)/6500K(Daylight)
 CRI Whites: 95+(Tungsten)/95+(Daylight)
 TLCI Whites: 95+(Tungsten)/95+(Daylight)
 TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)
 Lumens (Typical): 980(Tungsten)/1080(Daylight)

Dimension 2216 Hybrid, 360LEDs/m, DC24V, 10mm

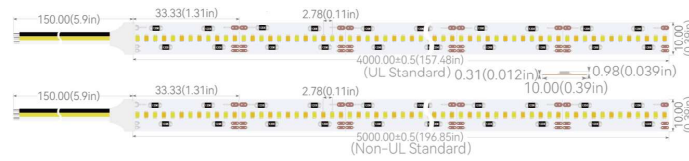

BARE WIRE



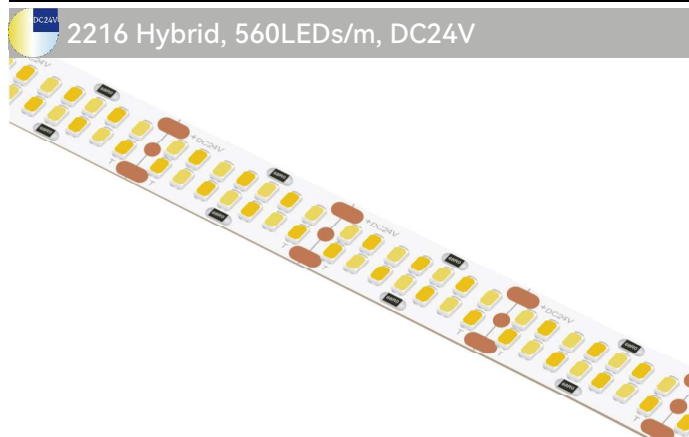


Product Code: GLUA12CV010L0600BI07W560C3
Part No.: GLU-S2L0600BI560-24V
LED Qty.: 560pcs
Working Voltage: DC24V
Power: 34.56W/m
Current: 1.44A
Beam Angle: 120°
Dimension(UL Standard): 3000×12×0.98mm(118.11×0.47×0.039in.)
Dimension(Non-UL Standard):5000×12×0.98mm(196.85×0.47×0.039in.)
Mini Cuttable Size: 25×10mm(0.98×0.47in.)
Operating Temperature: -20° C to +50° C
IP Grade: IP20
Standard Connector: 3Pin Bared cable
Standard Installation: 3M 9080HL Back adhesive
Life Span:50,000 Hrs
Certification: UL/CUL Listed, CE Compliant

24VDC Bi-color, DC24V

CCT Whites: 2000-10000K
Typic CCT Whites: 2800K(Tungsten)/6500K(Daylight)
CRI Whites: 95+(Tungsten)/95+(Daylight)
TLCI Whites: 95+(Tungsten)/95+(Daylight)
TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)
Lumens (Typical): 1610(Tungsten)/1770(Daylight)

Dimension 2216 Hybrid, 560LEDs/m, DC24V, 12mm

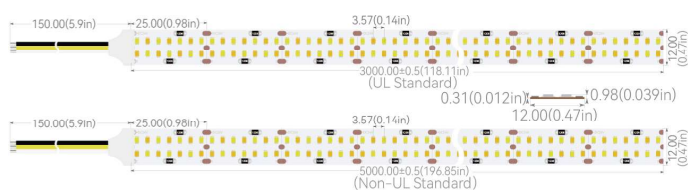

BARE WIRE

